

JOB NAME: _____


DATE: _____

TYPE: _____



DIMENSIONS:

46"(L) x 18-7/8"(W) x 2-6/8"(H)

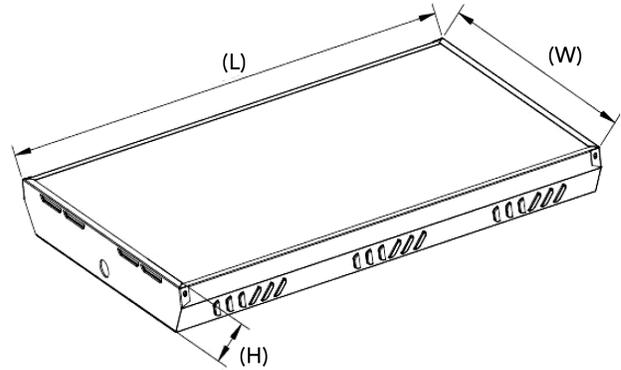

LLHB-180W-40K-D
LLHB-180W-50K-D

LED LINEAR HIGH BAYS

Ideal for one-for-one replacement of conventional lighting systems such as HID and fluorescent. Applications include manufacturing, warehousing and other large indoor spaces

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277 VAC/50~60 Hz
- Wattage: 150W
- Power factor: >0.9
- Efficacy: 155LM/W

HOUSING SPECIFICATIONS:

- Housing: Steel
- Steel Thickness: 24 Gauge
- With V-hooks
- Operating temperature: -40°F ~ 122°F

CERTIFICATIONS: UL, DLC



| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|-----------------|-------|-------------|---------|------------|
| LLHB-180W-40K-D | 150W | 100~277V AC | 23250LM | 4000K |
| LLHB-180W-50K-D | 150W | 100~277V AC | 23250LM | 5000K |

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED SMD type: Edison 2835
- Lens: Frosted PMMA (Plastic)
- Driver: Towin Driver
- Total lumens: 23250LM
- Updated higher lumens at lower wattages. Per industry standards, Lumens are reported without frosted lens (Removable)
- Color temperature: 4000K/5000K

WARRANTY: 5 years

