




Shown with
Optional sensor (Not Included)

DIMENSIONS:

34-3/4"(L) x 15-1/8"(W) x 2-7/8"(H)

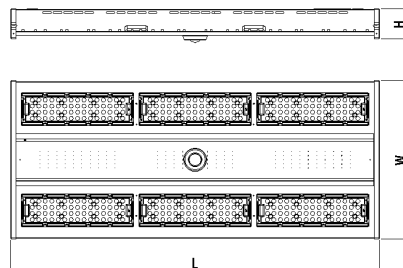

3.5 FT. Adjustable Suspension Kit
With Ceiling Mount Disks (Included)

Surface Mounting Kit
(Included)

| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|------------------|-------|-------------|----------|------------|
| LLHB2-150W-40K-D | 150W | 100~277V AC | 21000 LM | 4000K |
| LLHB2-150W-50K-D | 150W | 100~277V AC | 21000 LM | 5000K |

LLHB2-150W-40K-D
LLHB2-150W-50K-D

LED LINEAR HIGH BAYS

Ideal for one-for-one replacement of conventional lighting systems such as HID and fluorescent. Applications include manufacturing, warehousing and other large indoor spaces with mounting heights from 10 ft. to 40 ft. Luminaire shall be suspended at a minimum 24 inches from the ceiling.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277 VAC/50~60 Hz
- Wattage: 150 W
- Power factor: >0.9
- Efficacy: 140LM/W

HOUSING SPECIFICATIONS:


- Slim Aluminum
- Aluminum LED board
- Operating temperature: -40°F ~ 122°F

CERTIFICATIONS: UL, DLC



WARRANTY: 7 years

PHOTOMETRICS:

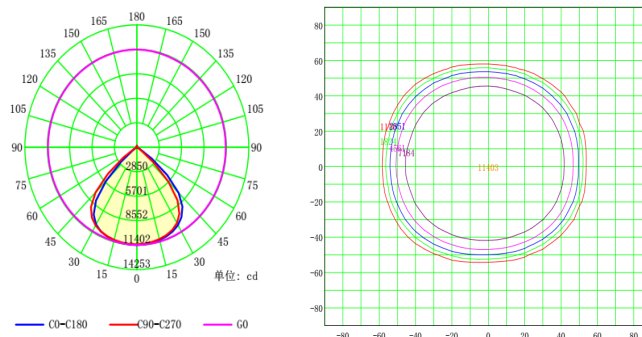

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED: Optical Polycarbonate Lens
- LED: LUMILEDS LED 140 LM/W
- Total lumens: 21000 LM
- Color temperature: 4000K & 5000K
- Color rendering index: >80
- Beam angle: 90°

