

LLHB4 SERIES

Industrial Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LLHB4-200W-MP-40K-D

LLHB4-200W-MP-50K-D

MULTI POWER 4TH GENERATION OF LINEAR HIGH BAYS




Ideal for replacement of conventional lighting systems such as HID and fluorescent. Applications include manufacturing warehousing and other large indoor spaces with mounting heights from 10ft. to 40ft. the fixture can be surface mounted also.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

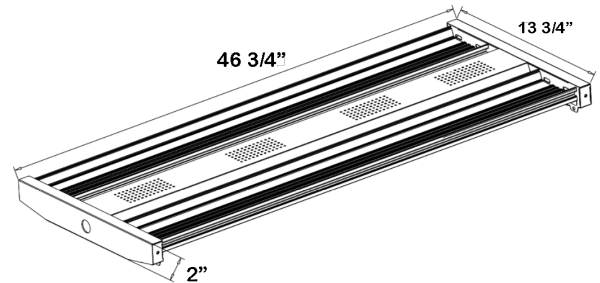

46 3/4" (L) X 13 3/4" (W) X 2" (H)

Features

- High Quality LED Chips To Provide High Efficiency, Heat Dissipation
- Stability, and Lumen Maintenance.
- Polycarbonate Lens, High Flame Retardant Point
- 50,000 H Rated Life
- 5-Year Warranty
- Multi-Power: The Switch is On The Driver

Technical Specifications

Electrical:

- Voltage: 120~277VAC/50~60 Hz
- Wattage: 100W/150W/200W
- Power factor: >0.95
- Efficacy: 155 LPW

Mechanical:

- Surge Protector
- Steel Housing
- Steel Thickness: 24 Gauge
- Unprecedented Quality.
- Aluminum LED Board
- Operating Temperature: -4°F to 131°F
- Suitable For Damp Locations

Lighting:

- Dimming: 0~10V Dimmable
- Lens: Polycarbonate Lens
- Multi-Power: The Switch is on the driver
- Total lumens: 27200LM Max.
- Color Temperatures: 4000K and 5000K
- Color Rendering Index: >80
- Wide Beam Angle
- LED SMD Type: Edison 2835

Applications:

- Warehouse
- Manufacturing Plants Distribution Centers
- Industrial Commercial
- Grocery Stores Gymnasiums

Other Models:



- 300W | 46500LM | LLHB4-300W-MP-40K-D
- 300W | 46500LM | LLHB4-300W-MP-50K-D




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

WG-ZC-Y7-2Y

Photometrics: LLHB4-200W-MP-D



BUG Rating: B4-U3-G3

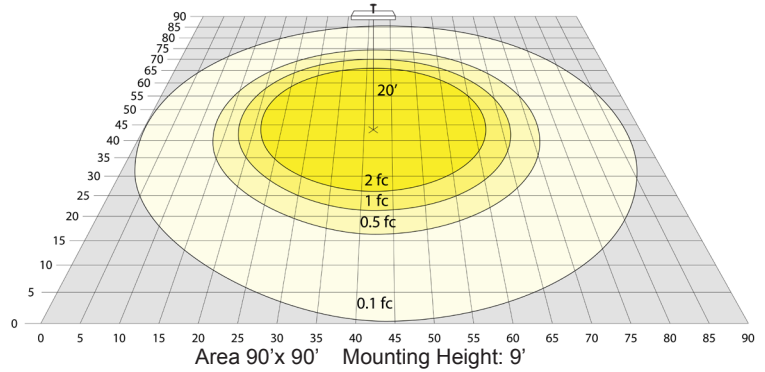

Other Views:



Front View



Side View



Back View

Performance Table: LLHB4-200W-MP-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LLHB4-200W-MP-40K-D	100W	120~277V	13600LM	4000K	B4-U3-G3	136
	150W		20400LM			
LLHB4-200W-MP-50K-D	200W		27200LM	5000K		

Sample Ordering

Model	Wattage	Multi Power	Color Temp.	Dimming
LLHB4	200W	MP		D
			40K = 4000K 50K = 5000K	

Accessory Options

SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 10FT. 1/16" SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS
 SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 20FT. 1/16" SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS
 LLHB4-RODKIT = OPTIONAL ROD KIT, 3-1/4" DIA. X 40" H
 WEC-2MD-35 = SENSOR COMPONENT
 OPT-LLHB-ULM-4FT-40W = 4FT UPLIGHT MODULE, 40W 200W & ABOVE
 OPT-LLHB-ULM-4FT-60W = 4FT UPLIGHT MODULE, 60W 200W & ABOVE


Factory-Installed Options

Blank = No Option
 OPT-SEN-LLHB4 = MICROWAVE Bi-Level SENSOR
 OPT-EM-HB4INT = INTERNAL EMERGENCY BATTERY BACKUP
 OPT-LLHB4-SMK = SURFACE MOUNTING OPTION
 OPT-FWH-63 = 6FT 3-WIRE WHIP
 OPT-FWH-65 = 6FT 5-WIRE WHIP
 OPT-FWH-66 = 6FT 6-WIRE WHIP
 OPT-HBC-125TL-WH = 8FT, 15A, 125V, WHITE
 OPT-HBC-277TL-WH = 8FT, 15A, 277V, WHITE
 OPT-HBC-125SB-WH = 10FT, 15A, 125V, 18/3STR, WHT

ACCESSORIES:



SCL-GSY10
SCL-GSY20



LLHB4-RODKIT
(Fixture Shown with LLHB4-RODKIT)




LLHB4-SMK
(Fixture Shown with LLHB4-SMK)



WEC-2MD-35
(Fixture Shown with WEC-2MD-35)

FACTORY-INSTALLED OPTIONS:



OPT-EM-HB4INT



OPT-SEN-LLHB4

