

LLHB4 SERIES Industrial Lighting

LLHB4-300W-MP-40K-D-SR

LLHB4-300W-MP-50K-D-SR

POWER ADJUSTABLE 4TH GENERATION OF LINEAR HIGH BAYS,
120-277V SENSOR READY

MP Multi Power/Wattage (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

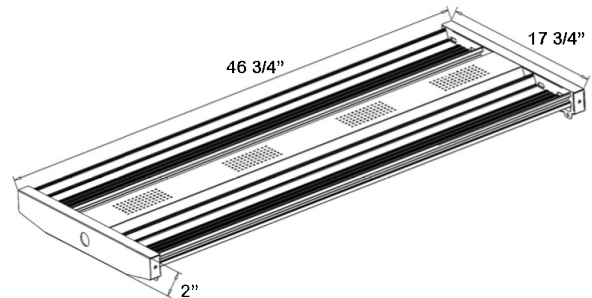

46 3/4" (L) X 17 3/4" (W) X 2" (H)

Ideal for replacement of conventional lighting systems such as HID and fluorescent. Applications include manufacturing warehousing and other large indoor spaces with mounting heights from 10ft. to 40ft. the fixture can be surface mounted also.

Features

- High Quality LED Chips to Provide High Efficiency, Heat Dissipation
- Stability, And Lumen Maintenance
- Polycarbonate Lens, High Flame Retardant Point
- 50,000 Hours Rated Life
- 5-Year Warranty
- Multi-Power: The Switch Is On The Driver

Technical Specifications

Electrical:

- Voltage: 120~277VAC/50~60 Hz
- Wattage: 150W/225W/300W
- Power Factor: >0.95
- Efficacy: 136 LPW

Mechanical:

- Pre-installed single-pin Audio Jack Socket for Motion Sensors; See Accessories
- Surge Protector
- Steel Housing
- Steel Thickness: 24 Gauge
- Unprecedented Quality.
- Aluminum LED Board
- Operating Temperature: -4°F ~ 131°F
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- Multi-Power: The Switch Is On The Driver
- Dimming: 0~10V Dimmable
- Lens: Polycarbonate Lens
- Total lumens: 40800LM (Per Industry Standards, Lumens are Reported Without Frosted Lens)
- Color Temperatures: 4000K and 5000K
- Color Rendering Index: >80
- Wide Beam Angle
- 50,000 Hours Rated Life

Applications:

- Warehouse
- Manufacturing Plants Distribution Centers
- Industrial Commercial
- Grocery Stores Gymnasiums
- Cold Storage

Other Models:

- 200W | 31000LM | LLHB4-200W-MP-40K-D
- 200W | 31000LM | LLHB4-200W-MP-50K-D



Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com







Diagram illustrating the area and mounting height for a 105' x 100' area. The area is divided into concentric circles representing different mounting heights. The mounting heights are labeled as 20', 2 fc, 1 fc, 0.5 fc, and 0.1 fc. The area is labeled as Area 105' x 100' and the mounting height is labeled as Mounting Height: 9'.



MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LLHB4-300W-MP-40K-D-SR	150W	120~277V	20400LM	4000K 5000K	B5-U3-G4	136
LLHB4-300W-MP-50K-D-SR	225W		30600LM			
	300W		40800LM			

Model	Wattage	Multi Power	Color Temp.	Dimming	Sensor
LLHB4	300W	MP	40K = 4000K 50K = 5000K	D	SR

SCL-GSY10
SCL-GSY20



LLHB4-RODKIT
(Fixture Shown with LLHB4-RODKIT)



LLHB4-SMK
(Fixture Shown with
LLHB4-SMK)

OPT-EM-HB4INT



Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |

