

LLHB4 SERIES Industrial Lighting

LLHB4-80-150W-MCTP-480V

POWER & CCT ADJUSTABLE 4TH GENERATION OF LINEAR HIGH BAYS



Ideal for replacement of conventional lighting systems such as HID and fluorescent. Applications include manufacturing warehousing and other large indoor spaces with mounting heights from 10ft. to 40ft. the fixture can be surface mounted also.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

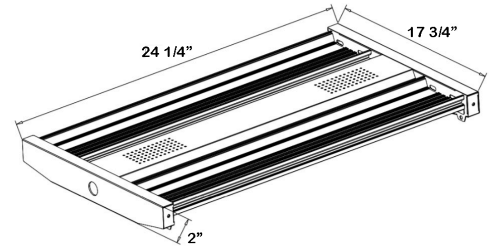

24 1/4" (L) X 17 3/4" (W) X 2" (H)

Features

- High Quality LED Chips to Provide High Efficiency, Heat Dissipation
- Stability, And Lumen Maintenance
- Multi CCT and Power: The Switch Is In The Driver
- Polycarbonate Lens, High Flame Retardant Point

Technical Specifications

Electrical:

- Voltage: 480V AC/50~60 Hz
- Wattage: 80W/110W/150W
- Power factor: >0.95
- Efficacy: 125LM/W

Mechanical:

- Surge Protector
- Steel Housing
- Steel Thickness: 24 Gauge
- Aluminum LED board
- Operating Temperature: -4°F ~ 131°F
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- Dimming: 0~10V dimmable
- Multi CCT and Power: The Switch is in the driver
- Lens: Polycarbonate Lens
- Total Lumens: 18750LM Max.
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: >80
- Wide Beam Angle
- LED SMD Type: Edison 2835
- 50,000 Hours Rated Life

Applications:

- Warehouse
- Manufacturing Plants Distribution Centers
- Industrial Commercial
- Grocery Stores Gymnasiums

Other Models:



- 150W | 18750LM | LLHB4-80-150W- MCTP




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: LLHB4-80-150W- MCTP-480V

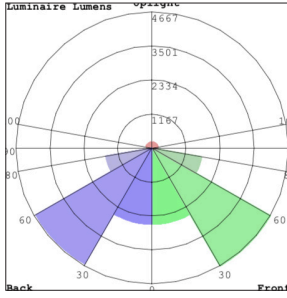

BUG Rating: B5-U3-G4

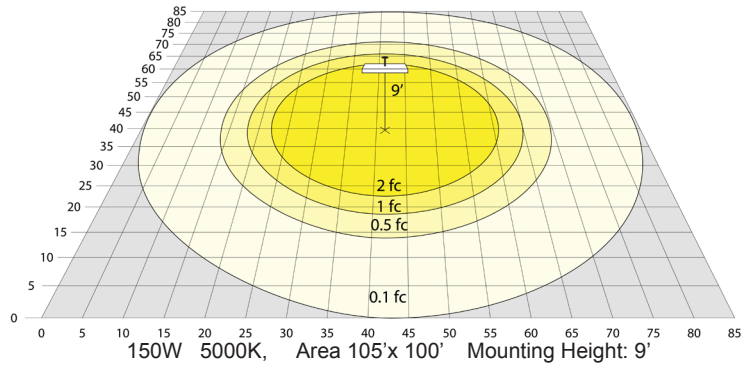

Other Views:



Front View



Side View



Back View

Performance Table: LLHB4-80-150W- MCTP-480V

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LLHB4-80-150W- MCTP-480V	80W 110W 150W	120~277V	18750LM	3500K 4000K 5000K	B4-U3-G2	125

Sample Ordering

Model	Wattage	Wattage	Color Temp.	Voltage				
LLHB4	-	80W	-	150W	-	MCTP	-	480V

Accessory Options

- SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 10FT. 1/16" SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS
- SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 20FT. 1/16" SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS
- LLHB4-RODKIT = OPTIONAL ROD KIT, 3-1/4" DIA. X 40" H
- WEC-2MD-35 = SENSOR COMPONENT
- LLHB4-150W-WG = WIRE GUARD FOR 150W
- LLHB4-SMK = SURFACE MOUNTING OPTION
- OPT-LLHB-ULM-2FT-20W = 2FT UPLIGHT MODULE, 20W 150W & ABOVE
- OPT-LLHB-ULM-2FT-40W = 2FT UPLIGHT MODULE, 40W 150W & ABOVE

Factory-Installed Options

- Blank = No Option
- OPT-SEN-LLHB4 = MICROWAVE Bi-Level SENSOR
- OPT-EM-HB4EXT = EXTERNAL EMERGENCY BATTERY BACKUP
- OPT-LLHB4-SMK = SURFACE MOUNTING OPTION
- OPT-FWH-63 = 6FT 3-WIRE WHIP
- OPT-FWH-65 = 6FT 5-WIRE WHIP
- OPT-FWH-66 = 6FT 6-WIRE WHIP
- OPT-HBC-125TL-WH = 8FT, 15A, 125V, WHITE
- OPT-HBC-277TL-WH = 8FT, 15A, 277V, WHITE
- OPT-HBC-125SB-WH = 10FT, 15A, 125V, 18/3STR, WHT
- LLHB4-150W-WG= 1Wire Guard for 150W


OPTIONAL ACCESSORIES



SCL-GSY10
SCL-GSY20



LLHB4-150W-WG
(Fixture Shown with
LLHB4-150W-WG)



LLHB4-RODKIT
(Fixture Shown with
LLHB4-RODKIT)




WEC-2MD-35
(Fixture Shown with
WEC-2MD-35)



LLHB4-SMK
(Fixture Shown with
LLHB4-SMK)

EMERGENCY BATTERY BACKUP AND SENSOR OPTIONS



OPT-EM-HB4EXT



OPT-SEN-LLHB4

