

LLVT SERIES Industrial Lighting

LLVT-4FT-40W-MCT-D-480V
LED LINEAR VAPOR LIGHT



Selection:



Customer Name: _____


Project Name: _____

Note: _____

Type: _____

Suitable for restaurants, bakeries, food facilities, gyms, pool areas workshops, garages, canopies, parking garages, cold storage facilities, food processing facilities, farmyards, and other harsh, humid, dusty, and wet environment lighting applications, and any application where NSF certified fixtures or high-end architectural designer grade fixtures are required.

NSF/ANSI 2:2015 Food Equipment: Splash Zone: Equipment surfaces that are subject to splash and food spillage during operation of the equipment other than those in a direct contact food-zone.

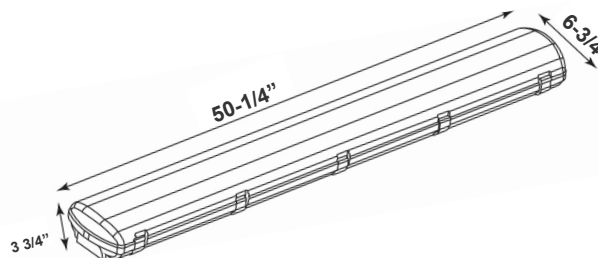

50-1/4" (L) x 6-3/4" (W) x 3-3/4" (H)

Features

- LED Linear Vapor Light
- Grey Finish
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Opal Polycarbonate
- Vandal-Proof Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 480V
- Wattage: 40W
- Power Factor: >0.98
- Efficacy: 122/ 119/ 135 LPW

Mechanical:

- Grey Finish
- Housing: Bayer® Brand Polycarbonate
- NSF Certified: NSF/ANSI 2 - Food Equipment. for Splash Zone and Non Food Zone
- Vandal-Proof Polycarbonate Lens
- Stainless steel clamp Stainless Steel Mounting Brackets Incorporated on the Back
- Polycarbonate Construction is Highly Impact Resistant
- UV-stabilized Polycarbonate Diffuser Eliminates Glare
- Diffuser Crystals Enhance Even Light Distribution
- Stainless Steel Clips Evenly Seal the Luminaire
- Operating Temp: -22°F to 110°F
- Suitable for Wet Locations
- IP Rating: IP65

Lighting:


- Dimmable: 0~10V Dimming
- LED SMD type: Edison 2835
- Total Lumens: 5224LM/5230LM/5525LM
- Color Temperatures: 3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 80

Applications:


- Ideal for offices, retail stores, showrooms, and residential applications. Uniquely suited for areas where accessing the fixture is challenging
- Suitable for restaurants, bakeries, food facilities, gyms, pool areas, and any application where NSF certified fixtures or high-end architectural designer grade fixtures are required.
- NSF/ANSI 2:2015 Food Equipment: Splash Zone: Equipment surfaces that are subject to splash and food spillage during operation of the equipment other than those in a direct contact food-zone



Photometrics: LLVT-4FT-40W-MCT-D-480V

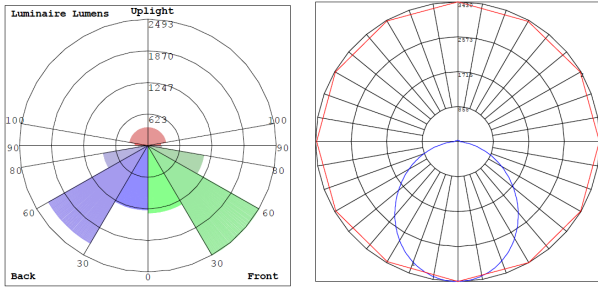

BUD Rating: B2-U3-G2

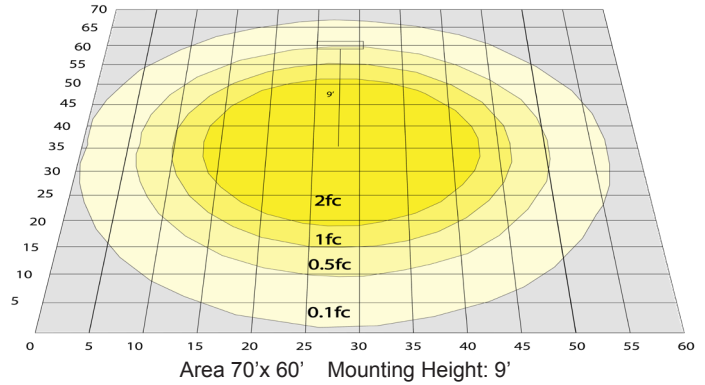

Other Views:



Side View



Front View



Back View

Performance Table: LLVT-4FT-40W-MCT-D-480V

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LLVT-4FT-40W-MCT-D-480V	40W	480V	5224LM	3500K	B2-U3-G2	122
			5230LM	4000K		119
			5525LM	5000K		135

Sample Ordering

Model	Size	Wattage	Color Temp.	Feature	Voltage
LLVT	4FT	40W	MCT	D	480V

Accessories:

Blank = No Option For Accessories
 LLVT-4FT-RL= 4FT REPLACEMENT LENS

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-CM2INT= INTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-2MDR-36=PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR
 WEC-3RC=OPTIONAL REMOTE CONTROL

SENSOR AND EMERGENCY BATTERY BACK UP OPTIONS:



OPT-EM-CM2INT



OPT-SEN-2MDR-36



WEC-3RC

Example:

1. LLVT-4FT-40W-MCT-D-480V (FOR LLVT 4FT 40W MCT FIXTURE 480V)
2. LLVT-4FT-40W-MCT-D-480V OPT-EM-CM2INT (FOR LLVT 4FT 40W MCT FIXTURE 480V) (INTERNAL EMERGENCY BACKUP BATTERY)

