

LLVT SERIES

Industrial Lighting

LLVT-4FT-75W-40K-D
LLVT-4FT-75W-50K-D



Selection:



Suitable for restaurants, bakeries, food facilities, gyms, pool areas workshops, garages, canopies, parking garages, cold storage facilities, food processing facilities, farmyards, and other harsh, humid, dusty, and wet environment lighting applications, and any application where NSF certified fixtures or high-end architectural designer grade fixtures are required.


NSF/ANSI 2:2015 Food Equipment: Splash Zone: Equipment surfaces that are subject to splash and food spillage during operation of the equipment other than those in a direct contact food-zone.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

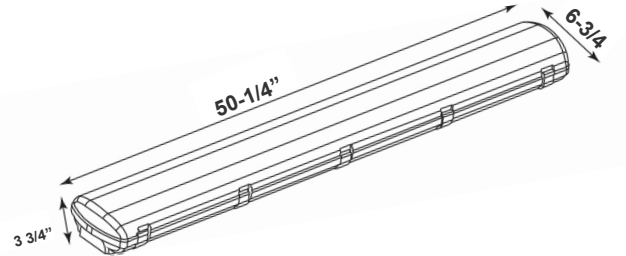

50-1/4" (L) x 6-3/4" (W) x 3-3/4" (H)

Features

- Grey Finish
- 5-Year Warranty
- LED Linear Vapor Light
- 50,000 Hours Rated Life
- Lens: Opal Polycarbonate (Vandal-Proof)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 75W
- Power Factor: >0.98
- Efficacy: 125 LPW

Mechanical:

- Grey Finish
- Housing: Bayer® Brand Polycarbonate
- NSF Certified: NSF/ANSI 2 - Food Equipment. for Splash Zone and Non Food Zone
- Stainless Steel Clamp
- Vandal-Proof Polycarbonate Lens
- Stainless Steel Mounting Brackets Incorporated on the Back
- Polycarbonate Construction is Highly Impact Resistant
- UV-stabilized Polycarbonate Diffuser Eliminates Glare
- Diffuser Crystals Enhance Even Light Distribution
- Stainless Steel Clips Evenly Seal the Luminaire
- Operating Temp: -22°F to 110°F
- Suitable for Wet Locations
- IP Rating: IP65

Lighting:

- Dimmable: 0~10V Dimming
- LED SMD type: Edison 2835
- Total Lumens: 9375LM
- Color Temperatures: 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80

Applications:

- Ideal for offices, retail stores, showrooms, and residential applications. Uniquely suited for areas where accessing the fixture is challenging
- Suitable for restaurants, bakeries, food facilities, gyms, pool areas, and any application where NSF certified fixtures or high-end architectural designer grade fixtures are required.
- NSF/ANSI 2:2015 Food Equipment: Splash Zone: Equipment surfaces that are subject to splash and food spillage during operation of the equipment other than those in a direct contact food-zone





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-Z6-Z9-ZZ

Photometrics: LLVT-4FT-75W



BUD Rating: B3-U3-G3

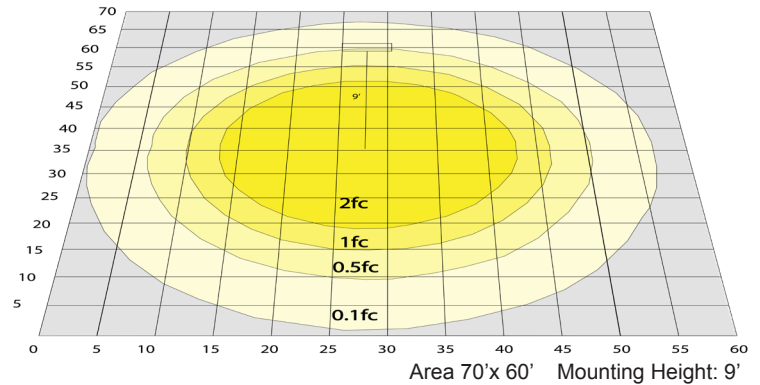

Other Views:



Side View



Front View



Back View

Performance Table: LLVT-4FT-75W

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|--------------------|---------|----------|--------|-------------|------------|-----|
| LLVT-4FT-75W-40K-D | 75W | 120~277V | 9375LM | 4000K | B3-U3-G3 | 125 |
| LLVT-4FT-75W-50K-D | 75W | 120~277V | 9375LM | 5000K | B3-U3-G3 | 125 |

Sample Ordering

| Model | Size | Wattage | Color Temp. | Feature |
|-------|------|---------|----------------|---------|
| LLVT | 4FT | 75W | 4000K 5000K | D |

Accessories:

Blank = No Option For Accessories
LLVT-4FT-RL= 4FT REPLACEMENT LENS

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-CM2INT= INTERNAL EMERGENCY BACKUP BATTERY
OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE
OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE
OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A, 125V, 3-CONDUCTOR 18AWG, WHITE
OPT-SEN-2MDR-36=PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR
WEC-3RC=OPTIONAL REMOTE CONTROL

Example:

1. LLVT-4FT-75W-40K-D (FOR LLVT 4FT 75W 40K FIXTURE 120-277V)
2. LLVT-4FT-75W-40K-D (FOR LLVT 4FT 75W 40K FIXTURE 120-277V)
OPT-EM-CM2INT (INTERNAL EMERGENCY BACKUP BATTERY)

SENSOR AND EMERGENCY BATTERY BACK UP OPTIONS:



OPT-HBC-125SB-WH



OPT-HBC-125TL-WH



OPT-EM-CM2INT



OPT-HBC-277TL-WH



OPT-SEN-2MDR-36



WEC-3RC

