


**DIMENSIONS:**

96" (L) x 4-3/4" (W) x 4-1/4" (D)

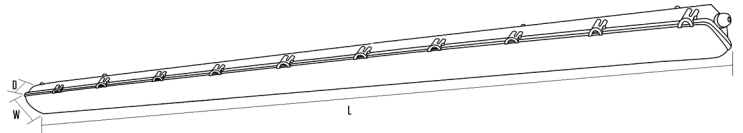

**LLVT-8FT-68W-50k-D**  
**LLVT-8FT-68W-40k-D**

**LED LINEAR VAPOR LIGHT**

Ideal for workshops, garages, canopies, parking garages, cold storage facilities, food processing facilities, farmyards, and other harsh, humid, dusty and wet environment lighting applications.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120-277VAC 50/60Hz
- Wattage: 68W
- Power factor: >0.95
- Efficacy: 107LM/W

**HOUSING SPECIFICATIONS:**

- Polycarbonate construction is highly impact resistant
- Stainless Steel Mounting Brackets Incorporated on the Back
- UV-stabilized Polycarbonate diffuser eliminates glare
- Diffuser crystals enhance even light distribution
- Stainless Steel clips evenly seal the luminaire
- Operating temperature: -22°F~104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Suitable for Wet Locations

**CERTIFICATIONS: DLC**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LLVT-4FT-75W-50k-D	68W	120~277V AC	7300LM	5000K
LLVT-4FT-75W-40k-D	68W	120~277V AC	7300LM	4000K

**LIGHTING SPECIFICATIONS:**

- Dimming: 0~10V dimmable
- LED SMD type: Edison 2835
- Lens: Opal polycarbonate
- Driver: Quantum
- Total lumens: 7300LM
- Color temperature: 4000K/5000K
- Color rendering index: >82
- Beam angle: H103.9° & V113.8°

**WARRANTY: 5 years**

