

LLVT2 SERIES Industrial Lighting

LLVT2-4FT-36W-35K-D
LLVT2-4FT-36W-40K-D
LLVT2-4FT-36W-50K-D



Selection:



Suitable for restaurants, bakeries, food facilities, gyms, pool areas workshops, garages, canopies, parking garages, cold storage facilities, food processing facilities, farmyards, and other harsh, humid, dusty, and wet environment lighting applications, and any application where NSF certified fixtures or high-end architectural designer grade fixtures are required.


NSF/ANSI 2:2015 Food Equipment: Splash Zone: Equipment surfaces that are subject to splash and food spillage during operation of the equipment other than those in a direct contact food-zone.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

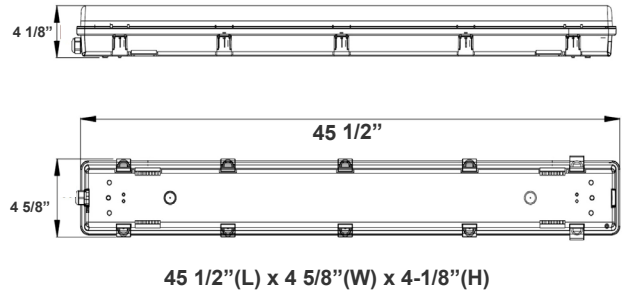

Features

- LED Linear Vapor Light
- Grey Finish
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Opal PC frosted opaque

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 36W
- Power Factor: >0.98
- Efficacy: 130 LPW

Mechanical:

- Grey Finish
- Housing: Polycarbonate
- Vandal-Proof Polycarbonate Lens
- Polycarbonate Construction Highly Impacts Resistant
- UV-stabilized Polycarbonate Diffuser Eliminates Glare
- Diffuser crystals enhance even light distribution
- Stainless Steel clips evenly seal the luminaire
- Stainless steel clamp
- Operating Temp: -22°F to 104°F
- Suitable for Wet Locations
- IP Rating: IP66

Lighting:

- Dimmable: 0~10V Dimming
- LED SMD type: 2835
- Total Lumens: 4680LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80

Applications:

- Ideal for offices, retail stores, showrooms, and residential applications. Uniquely suited for areas where accessing the fixture is challenging
- Suitable for restaurants, bakeries, food facilities, gyms, pool areas, and any application where NSF certified fixtures or high-end architectural designer grade fixtures are required.
- NSF/ANSI 2:2015 Food Equipment: Splash Zone: Equipment surfaces that are subject to splash and food spillage during operation of the equipment other than those in a direct contact food-zone





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-Z6-Z9-ZZ

Photometrics: LLVT2-4FT-36W



BUG Rating: B2-U3-G2

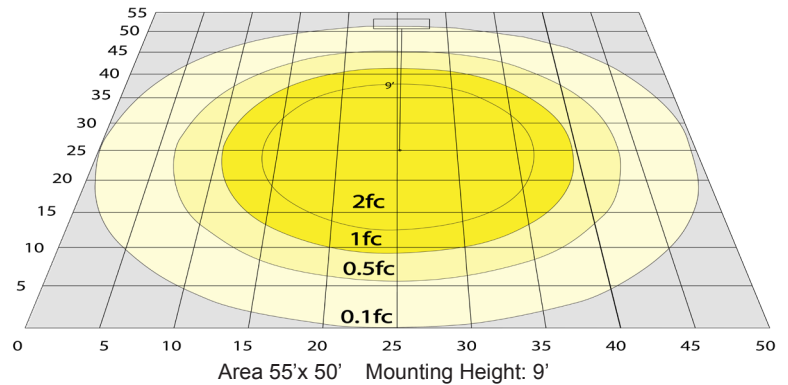

Other Views:



Side View



Front View



Back View

Performance Table: LLVT2-4FT-36W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LLVT2-4FT-36W-35K-D	36W	120~277V	4680LM	3500K	B2-U3-G2	130
LLVT2-4FT-36W-40K-D	36W	120~277V	4680LM	4000K	B2-U3-G2	130
LLVT2-4FT-36W-50K-D	36W	120~277V	4680LM	5000K	B2-U3-G2	130

Sample Ordering

Model	Size	Wattage	Color Temp.	Feature
LLVT2	4FT	36W	3500K 4000K 5000K	D

Accessory:

Blank = No Option For Accessories
WEC-3RC=OPTIONAL REMOTE CONTROL

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-CM1INT= INTERNAL EMERGENCY BACKUP BATTERY
OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE
OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE
OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE
OPT-SEN-2MDR-36=PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

Example:

1. LLVT2-4FT-36W-40K-D (FOR LLVT2 4FT 36W 40K FIXTURE 120-277V)
2. LLVT2-4FT-36W-40K-D (FOR LLVT2 4FT 36W 40K FIXTURE 120-277V)
OPT-EM-CM1INT (INTERNAL EMERGENCY BACKUP BATTERY)

ACCESSORY:



WEC-3RC

SENSOR AND EMERGENCY BATTERY BACK UP OPTIONS:



OPT-EM-CM1INT



OPT-SEN-2MDR-36



OPT-HBC-277TL-WH



OPT-HBC-125SB-WH



OPT-HBC-125TL-WH

