

LLVT2 SERIES Industrial Lighting


LLVT2-4FT-65W-MCT-D



Suitable for restaurants, bakeries, food facilities, gyms, pool areas workshops, garages, canopies, parking garages, cold storage facilities, food processing facilities, farmyards, and other harsh, humid, dusty, and wet environment lighting applications, and any application where NSF certified fixtures or high-end architectural designer grade fixtures are required.

NSF/ANSI 2:2015 Food Equipment: Splash Zone: Equipment surfaces that are subject to splash and food spillage during operation of the equipment other than those in a direct contact food-zone.

Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

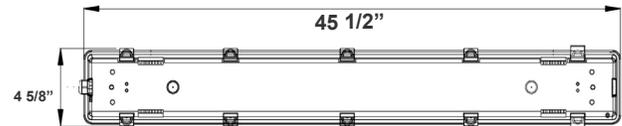

45 1/2"(L) x 4 5/8"(W) x 4 1/8"(H)

Features

- Grey Finish
- 5-Year Warranty
- LED Linear Vapor Light
- 50,000 Hours Rated Life
- Lens: Opal PC frosted opaque
- Vandal-Proof Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 65W
- Power Factor: >0.98
- Efficacy: 131/ 133/ 141LPW

Mechanical:

- Grey Finish
- Housing: Polycarbonate
- Vandal-Proof Polycarbonate Lens
- Polycarbonate Construction Highly Impacts Resistant
- UV-stabilized Polycarbonate Diffuser Eliminates Glare
- Diffuser crystals enhance even light distribution
- Stainless Steel clips evenly seal the luminaire
- Stainless steel clamp
- Operating Temp: -22°F to 104°F
- Suitable for Wet Locations
- IP Rating: IP66

Lighting:

- Dimmable: 0~10V Dimming
- LED SMD type: 2835
- Total Lumens: 8500LM/ 8650LM/ 9150LM
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Temperatures: 3500K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80

Applications:



- Ideal for offices, retail stores, showrooms, and residential applications. Uniquely suited for areas where accessing the fixture is challenging
- Suitable for restaurants, bakeries, food facilities, gyms, pool areas, and any application where NSF certified fixtures or high-end architectural designer grade fixtures are required.
- NSF/ANSI 2:2015 Food Equipment: Splash Zone: Equipment surfaces that are subject to splash and food spillage during operation of the equipment other than those in a direct contact food-zone

Other Models:


- 36W | 4700LM | LLVT2-4FT-36W-MCT-D
- 46W | 6350LM | LLVT2-4FT-46W-MCT-D



Photometrics: LLVT2-4FT-65W-MCT



BUG Rating: B3-U3-G3

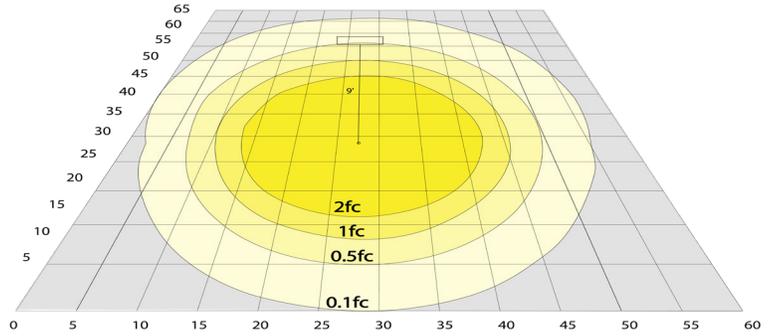

Area 65'x 60' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LLVT2-4FT-65W-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LLVT2-4FT-65W-MCT-D	65W	120~277V	8500LM	3500K	B3-U3-G3	131
			8600LM	4000K		133
			9150LM	5000K		141

Sample Ordering

Model Size Wattage Color Temp. Feature

LLVT2 - 4FT - 65W - MCT - D

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-CM2INT= INTERNAL EMERGENCY BACKUP BATTERY
 OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE
 OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE
 OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE
 OPT-SEN-2MDR-36=PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR
 WEC-3RC=OPTIONAL REMOTE CONTROL

SENSOR AND EMERGENCY BATTERY BACK UP OPTIONS:



OPT-HBC-125SB-WH



OPT-HBC-125TL-WH



OPT-HBC-277TL-WH



OPT-EM-CM2INT



OPT-SEN-2MDR-36



WEC-3RC

Example:

1. LLVT2-4FT-65W-MCT-D

(FOR LLVT2 4FT 65W MCT FIXTURE 120-277V)

2. LLVT2-4FT-65W-MCT-D
OPT-EM-CM1INT

(FOR LLVT2 4FT 65W MCT FIXTURE 120-277V)
(INTERNAL EMERGENCY BACKUP BATTERY)

