




**LLXT-RW**  
**LLXT-GW**  
**LLXT-RB**  
**LLXT-GB**

## DIMENSIONS:

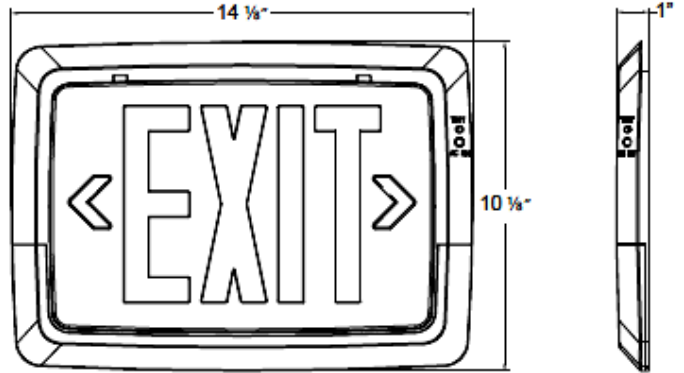

MODEL	VOLTAGE	NUMBER OF FACEPLATES	FACEPLATE	BATTERY	LETTERS COLOR
LLXT-RW	Dual 120-277V	Single	Frost White	Ni-Cad	Red
LLXT-GW	Dual 120-277V	Single	Frost White	Ni-Cad	Green
LLXT-RB	Dual 120-277V	Single	Black	Ni-Cad	Red
LLXT-GB	Dual 120-277V	Single	Black	Ni-Cad	Green

## TECHNICAL SPECIFICATIONS:

- 3.6V Long life, maintenance-free, rechargeable Ni-Cad battery.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Internal solid-state transfer switch automatically connects the internal battery to Red/Green LED board and the White LED light strip for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Unique bi-color LED indicator alerts occupant on battery condition (Green-normal, Red-check battery).

## WET LOCATION LED EXIT SIGN

### ELECTRICAL SPECIFICATIONS:

- Voltage: Dual Circuit with 277V
- Wattage: 3.1W

### HOUSING SPECIFICATIONS:

- Patented specification-grade, low profile thin plastic design is ideal for low level applications
- Universal K/O pattern on back plate for wall mount.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Single faceplates
- Left or right arrow (Chevron)
- Mounting accessories included
- Suitable for Damp location

### CERTIFICATIONS: UL



### WARRANTY: 3 years

- Meets UL924, NFPA life safety code, Local and State codes, NEC, OSHA

