

# LMW SERIES Outdoor Lighting

**LMW-10-24W-MCP-P-BK**  
POWER & CTT - ADJUSTABLE LED MINI CUTOFF WALLPACK  
**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)



Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ | Type: \_\_\_\_\_



Avail Finishes:



5 1/8"(H) x 5"(W) x 2 3/4"(L)

LED mini cutoff wall pack is ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas, residential areas, balcony, terrace, small shops.

## Features

- High Transparent Tempered Glass
- Die-Cast Aluminum With Powder Coat Finish
- Die-Cast Aluminum With Powder Coat Finish
- 7-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 10W/15W/24W
- Power Factor: >0.9
- Efficacy: 110LM/W

### Lighting:

- Total Lumens: 2540LM Max.
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 110° X 100°
- Rated life: 70,000 Hrs

### Mechanical:

- Die-Cast Aluminum With Powder Coat Finish
- High Transparent Tempered Glass
- Operating Temperature: -4°F to +104°F
- 7-Year Warranty
- IP 54, Suitable for Wet Locations

### Applications:



- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas
- Residential area
- Balcony
- Terrace
- Small shops

### Other Models:


- 24W | 2640LM | LMW-10-24W-MCP-P
- 24W | 2640LM | LMW-10-24W-MCP-P-WH



## Photometrics: LMW-10-24W-MCTP-P-BK



BUG Rating: B1-U2-G0

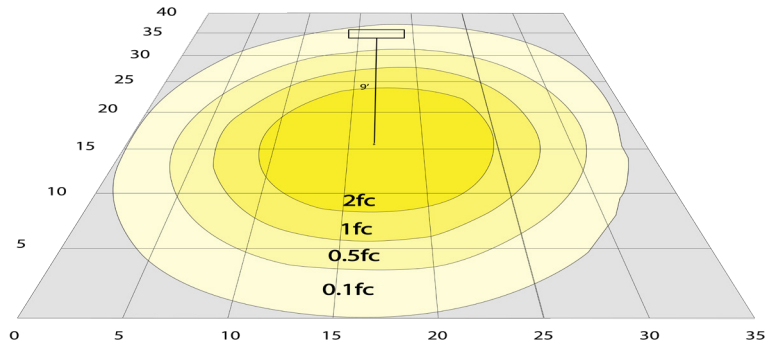

Area 40'x 35' Mounting Height: 9'


## Other Views:



Lens View



Side View



Front View



Back View

## Performance Table: LMW-10-24W-MCP-P-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LMW-10-24W-MCP-P-BK	10W 15W 24W	120~277V	1100LM 1650LM 2640LM	3000K 4000K 5000K	B1-U2-G0	110

## Sample Ordering

Model	Wattage	Wattage	Color Temp.	Photocell	Finish					
LMW	-	10	-	24W	-		-	P	-	BK
										3000K 4000K 5000K

## Accessories:

Blank = No Option For Accessories

WMS-POST1-18 = 18" ONE SIDE OPTIONAL POST, BLACK FINISH

WMS-POST2-18 = 18" TWO SIDE OPTIONAL POST, BLACK FINISH

WMS-POST1-36 = 36" ONE SIDE OPTIONAL POST, BLACK FINISH

WMS-POST2-36 = 36" TWO SIDE OPTIONAL POST, BLACK FINISH

## Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-FM10D= EMERGENCY BACKUP EXTERNAL BATTERY, BACK BOX

OPT-SEN-LMW-3MRLV-5= PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

OPT-PC-B1 = PHOTOCELL 120-277V

## ACCESSORIES:



WMS-POST1-18



WMS-POST2-18



WMS-POST1-36



WMS-POST2-36

## FACTORY-INSTALLED OPTIONS:



OPT-EM-FM10D



OPT-SEN-LMW-3MRLV-5



OPT-PC-B1

