

LOHB SERIES OUTDOOR LIGHTING

LOHB-4FT-120W-30K
LOHB-4FT-120W-50K



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____



45"(L) x 3"(H) x 4 1/2"(W)

This outdoor lighting is Ideal for Wall wash, sign, suspended outdoor/indoor lighting, small stadium and tracks

Features

- Die-cast Aluminum with Black Powder Coat Finish
- Removable 1/2" NPT Threaded Knuckles Included
- 7-Year Warranty
- Removable Half Shroud Included

Technical Specifications

Electrical:

- Voltage: 120~277V; 50/60Hz AC
- THD: <20%
- Power Factor: >0.9
- Wattage: 120W
- Efficacy: 125 LPW

Mechanical:

- Die-cast Aluminum with Black Powder Coat Finish
- Removable 1/2" NPT Threaded Knuckles Included
- Cord Type: 3.2 SJTW 18/3 AWG cable
- Removable Half Shroud Included
- Operating Temp: -40°F to 104°F
- Rated life: 50,000 hrs
- Wet Location
- IP Rating: IP65

Lighting:

- LED: Philips Lumileds Luxeon 3030 High Flux LED
- Total Lumens: 15300LM/ 15600LM
- Color Temperatures: 3000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle: 90°

Applications:



- Ideal for Wall wash, sign, suspended outdoor/indoor lighting, small stadium and tracks

Other Models:


- 50W | 6500LM | LOHB-2FT-50W-30K
- 50W | 6700LM | LOHB-2FT-50W-50K



Photometrics: LOHB-4FT

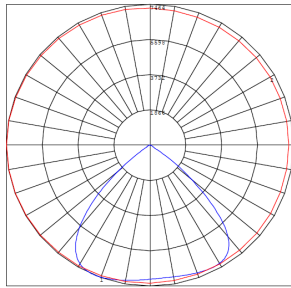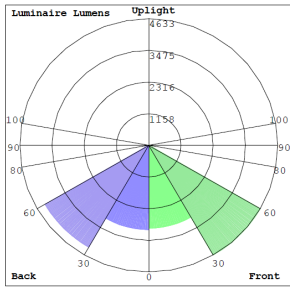

BUG Rating: B4-U0-G1

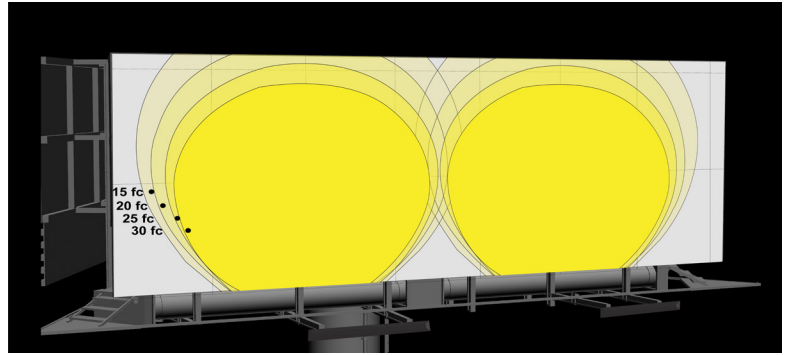

Billboard Size: 10.5'x 36' Mounting Distance: 6'

Other Views:



Side View



Front View



Back View

Performance Table: LOHB-4FT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LOHB-4FT-120W-30K	120W	120-277V	15300LM	3000K	B4-U0-G1	125
LOHB-4FT-120W-50K	120W	120-277V	15600LM	5000K	B4-U0-G1	125

Sample Ordering

- - -

30K = 3000K
 50K = 5000K

Accessories:

Blank = No Option For Accessories
 LOHB-C= Surface/Ceiling mounting conversion Bracket, (set of 2)

ACCESSORIES:



LOHB-C
 Surface/Ceiling
 mounting
 conversion
 Bracket, (set of 2)

Example:

1. LOHB-4FT-120W-30K
2. LOHB-4FT-120W-30K
LOHB-C

(FOR LOHB 120W 3000K OUTDOOR LIGHT FIXTURE 120-277V)

(FOR LOHB 120W 3000K OUTDOOR LIGHT FIXTURE 120-277V)
 (FOR SURFACE/CEILING MOUNTING CONVERSION BRACKET)