


JOB NAME: _____


DATE: _____

TYPE: _____

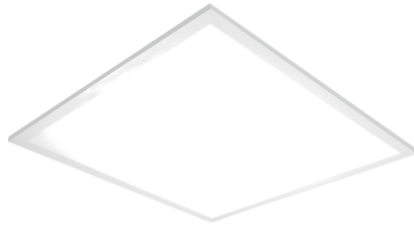

DIMENSIONS:

23.75"(L) x 23.75"(H) x 1.71"(D)

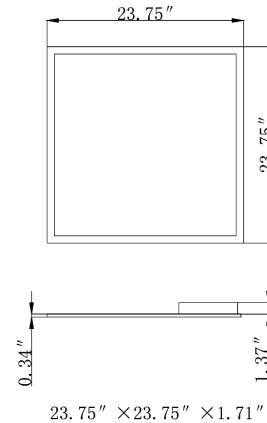

- LP-2X2-MW-50K-DS
- LP-2X2-MW-40K-DS
- LP-2X2-MW-35K-DS
- LP-2X2-MW-30K-DS
- LP-2X2-MW-27K-DS

LED PANEL LIGHTS WITH MULTI WATTAGE

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100-277VAC, 50/60Hz
- Wattage: 30W,35W,40W,50W
- Fixture Operating Voltage: 36VDC
- Current: 780mA~1300mA
- Power factor: >0.90
- Efficacy: 110LM/W
- THD: <15%

HOUSING SPECIFICATIONS:

- External driver mounted on top
- Earthquake hooks and suspension hooks pre-installed
- Operating temperature: -68°F ~ 104°F
- Lifespan: 50,000 Hrs.

CERTIFICATIONS: FC, UL



MODEL	WATTS	VOLTAGE	COLOR TEMP
LP-2X2-MW-50K-DS	30W,35W,40W,50W	100~277VAC	5000K
LP-2X2-MW-40K-DS	30W,35W,40W,50W	100~277VAC	4000K
LP-2X2-MW-35K-DS	30W,35W,40W,50W	100~277VAC	3500K
LP-2X2-MW-30K-DS	30W,35W,40W,50W	100~277VAC	3000K
LP-2X2-MW-27K-DS	30W,35W,40W,50W	100~277VAC	2700K

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED type: 2835SMD LM80
- No. of LED: 216
- Soft and wide light emitting
- Total lumens: 3300LM,3850LM,4400LM,5500LM
- Color temperature: 5000K/4000K/3500K/3000K/2700K
- Color rendering index: >80
- Soft and wide light emitting
- No infrared rays, no ultraviolet radiation, no thermal effect
- No flickering, no humming, no RF interference

WARRANTY: 5 years

