




DIMENSIONS:

51"(L) x 11"(W) x 4"(H)

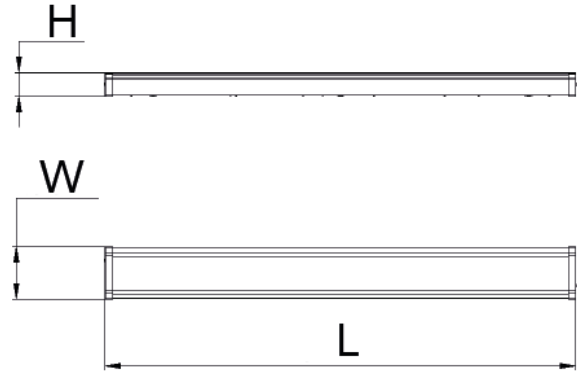

LPF-4FT-MCT-DD

4FT. LINEAR PUFF FIXTURE

Ideal for a variety of industrial, commercial and residential applications.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100V-277VAC
- Wattage: 0~40W
- Power factor: >0.95
- Efficacy: 90LM/W

HOUSING SPECIFICATIONS:

- Housing: Steel Housing
- White Finishing
- Operating temperature: -22°F~104°F
- Life Span: 50,000

CERTIFICATIONS: ETL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LPF-4FT-MCT-DD	40W	100V-277VAC	3600LM	MCT

LIGHTING SPECIFICATIONS:

- Dimming: Dual Dimming TRIAC & 0-10V
- Lens: White Acrylic diffuser
- Total lumens: 3600LM
- Color temperature: MCT: 3000K/4000K/5000K
- Color rendering index: >90

WARRANTY: 5 years

