LPNP SERIES Commercial Lighting

LPNP-2X4-5KLM-MCTP PREMIUM FLAT PANELS


Multi Color Temperature & Multi Power/Wattage (Selectable)



This indoor commercial LED Blacklit panel light is ideal for hotels, offices, retail outlets, restaurants, parking garages, storage rooms, conference rooms, education facilities, and more.



| Customer Name: | |
|----------------|-------|
| Project Name: | |
| Note: | Type: |



47.8"(L) x 23 4/5"(H) x 1 3/4"(D)

eatures

- Soft and Wide Light-Emitting
- 50,000 Hours Rated Life
- No infrared rays, No Ultraviolet Radiation, No Thermal Effect
- Earthquake H and Suspension Hooks Pre-Installed
- No Flickering, No Humming, No RF Interference
- Multi Color Temperature & Multi Power (Selectable Switch on Back of Fixture)

Technical Specifications

Electrical:

Voltage: AC120V-277V 50/60Hz

Power Factor: >0.90 Wattage: 30W/35W/40W Efficacy: 125 LPW

Fixture Operating Voltage: 36VDC Current (mA): 1050mA 36V DC Total Harmonic Distortion: ≤ 20 %

Mechanical:

- White Finish
- Earthquake Hooks and Suspension Hooks Pre-Installed
- External Driver Mounted on Top
- Operating Temperature: -68°F~104°F

Surge Protector: 1KV 5-Year Warranty

Lighting:

Dimmable: 0~10V Dimming Total Lumens: 5000LM Max.

Color Temperatures: 3500K/4000K/5000K

Color Rendering Index: CRI ≥ 80

Rated life: 50,000 hrs

Applications:

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

Other Models:

• 35W | 4375LM | LPNP-1X4-4KLM-MCTP

• 35W | 4375LM | LPNP-2X2-4KLM-MCTP














Photometrics: LPNP-2X4-5KLM-MCTP



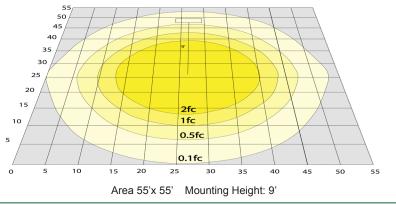

Other Views:







Side View

Front View

Performance Table: LPNP-2X4-5KLM-MCTP

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|--------------------|-------------------|----------|----------------------------|-------------------------|------------|-----|
| LPNP-2X4-5KLM-MCTP | 30W 35W 40W | 120~277V | 3750LM 4375LM 5000LM | 3500K 4000K 5000K | B2-U2-G1 | 125 |

Sample Ordering

| Model | | Size | Lumen | | Color Temp. | | | Feature |
|-------|---|------|-------|------|-------------|------|---|---------|
| LPNP | _ | 2X4 | _ | 5KLM | _ | MCTP | _ | D |

Accessories:

Blank = No Option For Accessories

LPNG-RMK-2X4 = RECESSED MOUNTING FLANGE (FRAME-IN) KIT FOR INSTALLATION IN HARD SURFACES

LPNG-SRFC-2X4 = SURFACE MOUNTING KIT FOR LPNG-2X4

WEC-2DLH-22=DAYLIGHT HARVESTING WEC-2CPDR-3=MOTION SENSOR

WEC-3RC=OPTIONAL REMOTE CONTROL

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-LP= EXTERNAL EMERGENCY BACKUP BATTERY

OPT-FWH-63= 6FT 3-WIRE WHIP OPT-FWH-65= 6FT 5-WIRE WHIP OPT-FWH-66= 6FT 6-WIRE WHIP

Packaging Info:

| | QTY | UOM | L (IN) | W (IN) | D (IN) | Weight (LBS) |
|---------------|-----|------|--------|--------|--------|--------------|
| Master Carton | 4 | Case | 25.39 | 6.38 | 49.05 | 39.38 |

NO PARTIAL. MUST BUY IN MASTER PKG. QTY.

ACCESSORIES and MOUNTING KIT:



FACTORY-INSTALLED OPTIONS:





OPT-EM-LP

OPT-FWH-63 OPT-FWH-65 OPT-FWH-66

