

LPNP SERIES Commercial Lighting

LPNP-2X4-5KLM-MCTP
PREMIUM FLAT PANELS

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____


Project Name: _____

Note: _____

Type: _____

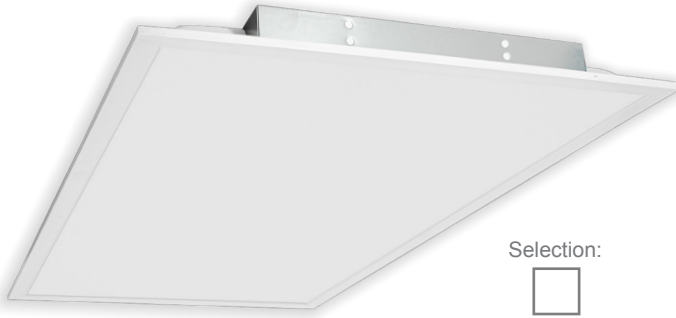

Selection:

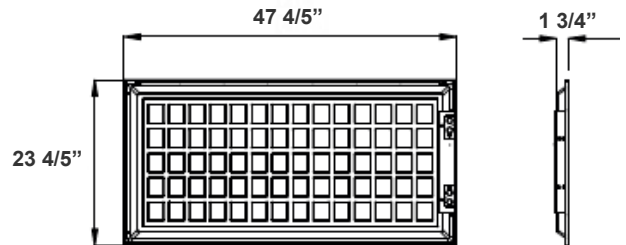

47.8"(L) x 23 4/5"(H) x 1 3/4"(D)

This indoor commercial LED Blacklit panel light is ideal for hotels, offices, retail outlets, restaurants, parking garages, storage rooms, conference rooms, education facilities, and more.

Features

- Soft and Wide Light-Emitting
- 50,000 Hours Rated Life
- No infrared rays, No Ultraviolet Radiation, No Thermal Effect
- Earthquake H and Suspension Hooks Pre-Installed
- No Flickering, No Humming, No RF Interference
- Multi Color Temperature & Multi Power (Selectable Switch on Back of Fixture)

Technical Specifications

Electrical:

- Voltage: AC120V-277V 50/60Hz
- Power Factor: >0.90
- Wattage: 30W/35W/40W
- Efficacy: 125 LPW
- Fixture Operating Voltage: 36VDC
- Current (mA): 1050mA 36V DC
- Total Harmonic Distortion: ≤ 20 %

Mechanical:

- White Finish
- Earthquake Hooks and Suspension Hooks Pre-Installed
- External Driver Mounted on Top
- Operating Temperature: -68°F~104°F
- Surge Protector: 1KV
- 5-Year Warranty

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 5000LM Max.
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Rated life: 50,000 hrs

Applications:

- Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

Other Models:

• 35W | 4375LM | LPNP-1X4-4KLM-MCTP

• 35W | 4375LM | LPNP-2X2-4KLM-MCTP




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-10192023

Photometrics: LPNP-2X4-5KLM-MCTP



BUG Rating: B2-U3-G2

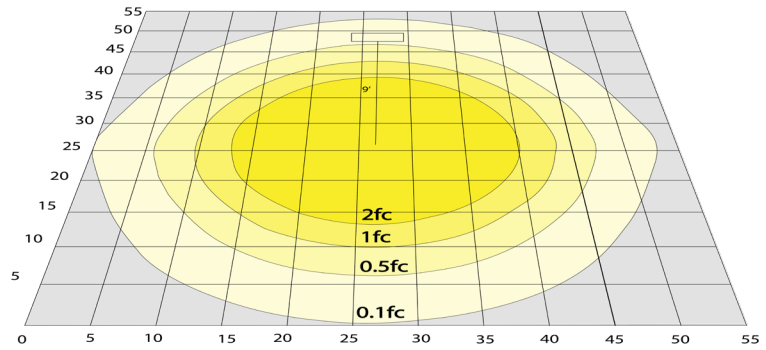


Area 55'x 55' Mounting Height: 9'


Other Views:



Side View



Front View



Back View

Performance Table: LPNP-2X4-5KLM-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LPNP-2X4-5KLM-MCTP	30W 35W 40W	120~277V	3750LM 4375LM 5000LM	3500K 4000K 5000K	B2-U2-G1	125

Sample Ordering

Model	Size	Lumen	Color Temp.	Feature
LPNP	2X4	5KLM	MCTP	D

Accessories:



Blank = No Option For Accessories

LPNG-RMK-2X4 = RECESSED MOUNTING FLANGE (FRAME-IN) KIT FOR INSTALLATION IN HARD SURFACES

LPNG-SRFC-2X4 = SURFACE MOUNTING KIT FOR LPNG-2X4

WEC-2DLH-22=DAYLIGHT HARVESTING

WEC-2CPDR-3=MOTION SENSOR

WEC-3RC=OPTIONAL REMOTE CONTROL

Factory-Installed Options:



Blank = No Option For Accessories

OPT-EM-LP= EXTERNAL EMERGENCY BACKUP BATTERY

OPT-FWH-63= 6FT 3-WIRE WHIP

OPT-FWH-65= 6FT 5-WIRE WHIP

OPT-FWH-66= 6FT 6-WIRE WHIP

Packaging Info:

	QTY	UOM	L (IN)	W (IN)	D (IN)	Weight (LBS)
Master Carton	4	Case	25.39	6.38	49.05	39.38

NO PARTIAL. MUST BUY IN MASTER PKG. QTY.

ACCESSORIES and MOUNTING KIT:



FACTORY-INSTALLED OPTIONS:

