


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_




Surface Mount  
Bracket Included

**LPS-S6-50K-D**  
**LPS-S6-40K-D**  
**LPS-S6-30K-D**

**DIMENSIONS:**

7.28"(L)X7.28"(W)X0.51"(H)

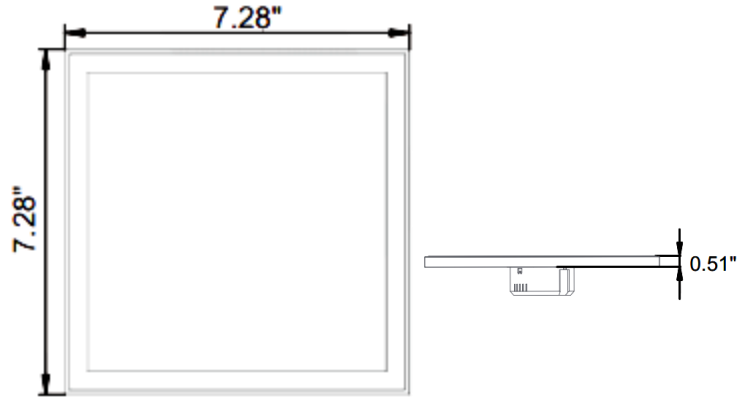

MODEL	WATTS	VOLTAGE	LUMENS UP/DOWN	COLOR TEMP
LPS-S6-50K-D	12W	120VAC	900LM	5000K
LPS-S6-40K-D	12W	120VAC	900LM	4000K
LPS-S6-30K-D	12W	120VAC	900LM	3000K

**LED SURFACE MOUNT PANELS**

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120VAC 50/60Hz
- Wattage: 12W
- Power factor: >0.95
- Efficacy: 75LM/W

**HOUSING SPECIFICATIONS:**

- White finish surface mount panel
- External Driver
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

**CERTIFICATIONS: UL**



**LIGHTING SPECIFICATIONS:**

- Dimming: TRIAC dimming
- Recommended Dimmers: DVCL-153P, MSCL-OP153M, CTCL-153P, SCL-153P
- Total lumens: 900LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >90

**WARRANTY: 5 years**

