LRD SERIES RESIDENTIAL LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LRD-10W-27K-3WTRSL
LRD-10W-30K-3WTRSL
LRD-10W-35K-3WTRSL
LRD-10W-40K-3WTRSL
LRD-10W-50K-3WTRSL

3" LED ARCHITECTURAL WINGED SLOT RECESSED LIGHTS


Customer Name:

Project Name:

Note: | Type:



WHITE BLACK

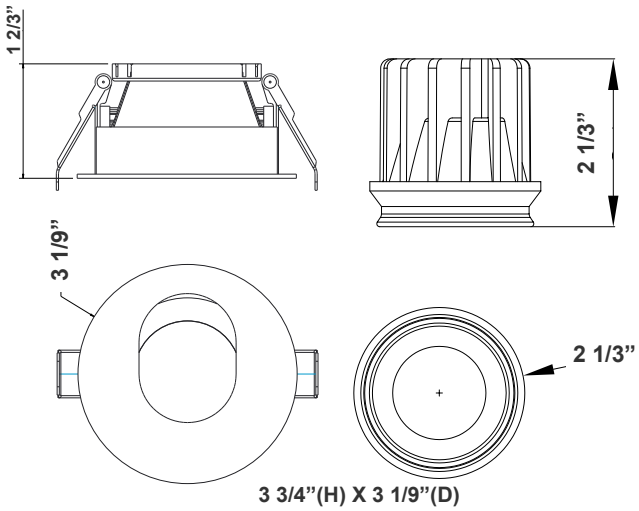

3 3/4"(H) X 3 1/9"(D)
Box Dimensions:
5-1/4" x 1-5/8" x 1-1/8"
Junction Area Dimensions:
2-1/16" x 1-5/8" x 1-1/8"

Ideal for New as well as old residential and commercial constructions.

Features

- 3" (2-1/8" Actual) LED Slot Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

Technical Specifications

Electrical:

- Voltage: 120VAC
- Wattage: 10W
- Power factor: >0.90
- Efficacy: Up to 70 LM/W

Mechanical:

- Up to 9 AWG18 Wires
- Die-Cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- Operating Temperature: 104°F
- IC-Rated, No Housing Required
- Damp Location Approved
- 5-Year Warranty

Lighting:


- Dimming: Dimmable down to 10% using standard TRIAC LED dimmer
- Total Lumens: 700LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: >90
- Beam Angle: 10°
- Lifespan: 50,000 Hrs.

Applications:


- Ideal for New as well as old residential and commercial constructions.

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

Photometrics: LRD-10W-3WTRSL

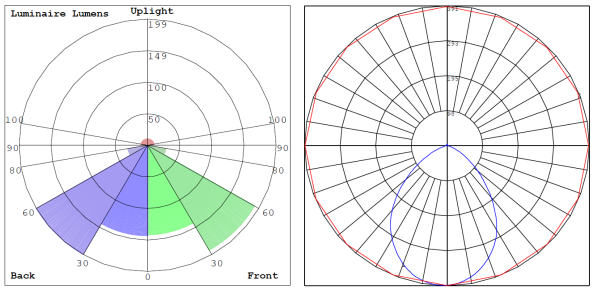

BUG Rating: B1-U2-G0

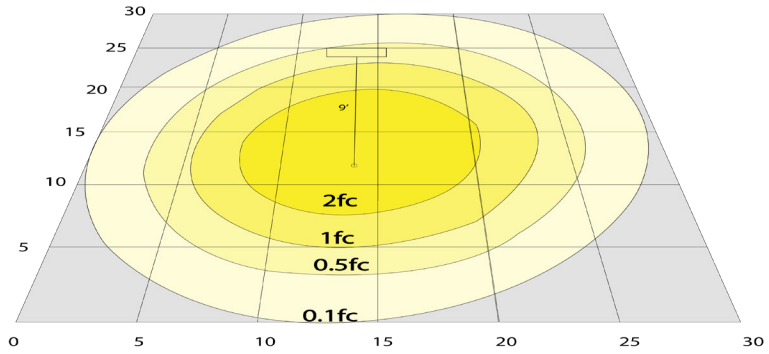

10W 5000K, Area 30'x 30' Mounting Height: 9'

Other Views:



LRD-WTR3SL-WH
LRD-WTR3SL-WH
LRD-WTR3SL-WH
LRD-WTR3SL-WH
LRD-WTR3SL-WH



LRD-EGN-10W-27K-D
LRD-EGN-10W-30K-D
LRD-EGN-10W-35K-D
LRD-EGN-10W-40K-D
LRD-EGN-10W-50K-D




LRD-10W-27K-3WTRSL-WH
LRD-10W-30K-3WTRSL-WH
LRD-10W-35K-3WTRSL-WH
LRD-10W-40K-3WTRSL-WH
LRD-10W-50K-3WTRSL-WH



LRD-WTR3SL-BK
LRD-WTR3SL-BK
LRD-WTR3SL-BK
LRD-WTR3SL-BK
LRD-WTR3SL-BK



LRD-EGN-10W-27K-D
LRD-EGN-10W-30K-D
LRD-EGN-10W-35K-D
LRD-EGN-10W-40K-D
LRD-EGN-10W-50K-D




LRD-10W-27K-3WTRSL-BK
LRD-10W-30K-3WTRSL-BK
LRD-10W-35K-3WTRSL-BK
LRD-10W-40K-3WTRSL-BK
LRD-10W-50K-3WTRSL-BK

Performance Table: LRD-7W-3WTRSL

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-10W-27K-3WTRSL	10W	120V	700LM	2700K	B1-U2-G0	70
LRD-10W-30K-3WTRSL				3000K		
LRD-10W-35K-3WTRSL				3500K		
LRD-10W-40K-3WTRSL				4000K		
LRD-10W-50K-3WTRSL				5000K		

Accessory:

Blank = No Option For Accessories
LRD-FGL = LRD SERES FROSTED GUASS LENS
RSL3-RI = 3" ROUND ROUGH-IN PLATE, 26" LONG



LRD-FGL



RSL3-RI
3" Round Rough-in Plate,26" long

Sample Ordering

Model		Wattage		Color Temp.		Size		Size
LRD	-	10W	-		-	3WTRSL	-	

27K = 2700K
30K = 3000K
35K = 3500K
40K = 4000K
50K = 5000K

WH = WHITE
BK = BLACK