LRD SERIES RESIDENTIAL LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LRD-10W-27K-4WTR
LRD-10W-30K-4WTR
LRD-10W-35K-4WTR
LRD-10W-40K-4WTR
LRD-10W-50K-4WTR

4" LED ARCHITECTURAL WINGED OPEN RECESSED LIGHTS

Customer Name:

Project Name:

Note: | Type:


MATTE GOLD


WHITE


BLACK ON BLACK


BLACK


CLEAR


MATTE SILVER









4 1/3"(H) X 3"(D)
Box Dimensions:
5-1/4" x 1-5/8" x 1-1/8"
Junction Area Dimensions:
2-1/16" x 1-5/8" x 1-1/8"

Ideal for New as well as old residential and commercial constructions.

Features

- 4" LED Winded Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

Technical Specifications

Electrical:

- Voltage: 120VAC
- Wattage: 10W
- Power Factor: >0.90
- Efficacy: Up to 70 LM/W

Mechanical:

- Up to 9 AWG18 Wires
- Die-Cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- IC-Rated, No Housing Required
- Operating Temperature: 104°F
- Damp Location Approved

Lighting:

- Dimming: Dimmable Down to 10% Using Standard TRIAC LED Dimmer
- Total Lumens: 700LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: >90
- Beam Angle: 24°
- Lifespan: 50,000 Hrs.

Applications:

- Ideal for New as well as old residential and commercial constructions.

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

WG-ZY-Z4-2Z

Photometrics: LRD-10W-4WTR

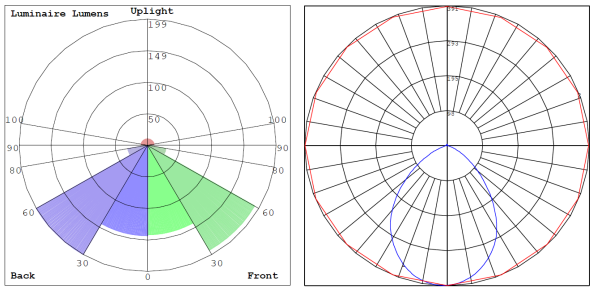

BUG Rating: B1-U2-G0

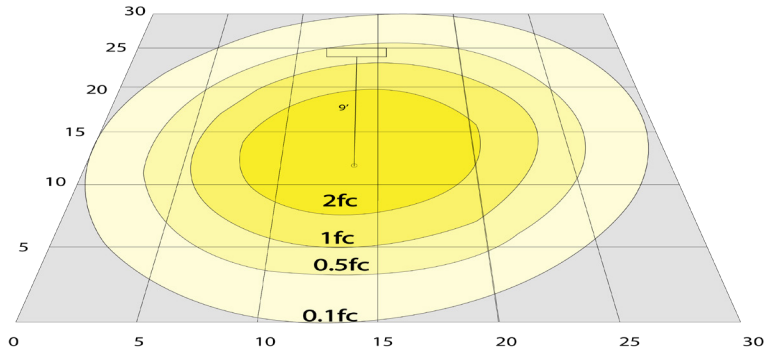

10W 5000K, Area 30'x 30' Mounting Height: 9'

Other Views:



LRD-WTR4-MG	LRD-EGN-10W-27K-D	LRD-10W-27K-4WTR-MG
LRD-WTR4-MG	LRD-EGN-10W-30K-D	LRD-10W-30K-4WTR-MG
LRD-WTR4-MG	LRD-EGN-10W-35K-D	LRD-10W-35K-4WTR-MG
LRD-WTR4-MG	LRD-EGN-10W-40K-D	LRD-10W-40K-4WTR-MG
LRD-WTR4-MG	LRD-EGN-10W-50K-D	LRD-10W-50K-4WTR-MG



LRD-WTR4-WH	LRD-EGN-10W-27K-D	LRD-10W-27K-4WTR-WH
LRD-WTR4-WH	LRD-EGN-10W-30K-D	LRD-10W-30K-4WTR-WH
LRD-WTR4-WH	LRD-EGN-10W-35K-D	LRD-10W-35K-4WTR-WH
LRD-WTR4-WH	LRD-EGN-10W-40K-D	LRD-10W-40K-4WTR-WH
LRD-WTR4-WH	LRD-EGN-10W-50K-D	LRD-10W-50K-4WTR-WH



LRD-WTR4-ABK	LRD-EGN-10W-27K-D	LRD-10W-27K-4WTR-ABK
LRD-WTR4-ABK	LRD-EGN-10W-30K-D	LRD-10W-30K-4WTR-ABK
LRD-WTR4-ABK	LRD-EGN-10W-35K-D	LRD-10W-35K-4WTR-ABK
LRD-WTR4-ABK	LRD-EGN-10W-40K-D	LRD-10W-40K-4WTR-ABK
LRD-WTR4-ABK	LRD-EGN-10W-50K-D	LRD-10W-50K-4WTR-ABK



LRD-WTR4-BK
LRD-WTR4-BK
LRD-WTR4-BK
LRD-WTR4-BK
LRD-WTR4-BK

+



LRD-EGN-10W-27K-D
LRD-EGN-10W-30K-D
LRD-EGN-10W-35K-D
LRD-EGN-10W-40K-D
LRD-EGN-10W-50K-D

=



LRD-10W-27K-4WTR-BK
LRD-10W-30K-4WTR-BK
LRD-10W-35K-4WTR-BK
LRD-10W-40K-4WTR-BK
LRD-10W-50K-4WTR-BK



LRD-WTR4-C
LRD-WTR4-C
LRD-WTR4-C
LRD-WTR4-C
LRD-WTR4-C

+



LRD-EGN-10W-27K-D
LRD-EGN-10W-30K-D
LRD-EGN-10W-35K-D
LRD-EGN-10W-40K-D
LRD-EGN-10W-50K-D

=



LRD-10W-27K-4WTR-C
LRD-10W-30K-4WTR-C
LRD-10W-35K-4WTR-C
LRD-10W-40K-4WTR-C
LRD-10W-50K-4WTR-C



LRD-WTR4-HZ
LRD-WTR4-HZ
LRD-WTR4-HZ
LRD-WTR4-HZ
LRD-WTR4-HZ

+



LRD-EGN-10W-27K-D
LRD-EGN-10W-30K-D
LRD-EGN-10W-35K-D
LRD-EGN-10W-40K-D
LRD-EGN-10W-50K-D

=



LRD-10W-27K-4WTR-HZ
LRD-10W-30K-4WTR-HZ
LRD-10W-35K-4WTR-HZ
LRD-10W-40K-4WTR-HZ
LRD-10W-50K-4WTR-HZ

Performance Table: LRD-10W-4WTR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-10W-27K-4WTR	10W	120V	700LM	2700K	B1-U2-G0	70
LRD-10W-30K-4WTR				3000K		
LRD-10W-35K-4WTR				3500K		
LRD-10W-40K-4WTR				4000K		
LRD-10W-50K-4WTR				5000K		

Accessory:

Blank = No Option For Accessories
LRD-FGL = LRD SERES FROSTED GUASS LENS
RSL4-RI-13 = 4" ROUND ROUGH-IN PLATE, 13" LONG
RSL4-RI = 4" ROUND ROUGH-IN PLATE, 26" LONG
RSL4-RIBH = NEW CONSTRUCTION RECESSED LT MOUNTING PLATE 4" HOLE WITH HANGER BARS

Accessory:



LRD-FGL



RSL4-RI-13
4" Round Rough-in Plate, 13" Long



RSL4-RI
4" Round Rough-in Plate, 26" Long



RSL4-RIBH
New Construction Recessed LT Mounting Plate 4" Hole With Hanger Bars

Sample Ordering

Model		Wattage		Color Temp.		Size		Size
LRD	-	10W	-		-	4WTR	-	

27K = 2700K
30K = 3000K
35K = 3500K
40K = 4000K
50K = 5000K

MG = MATTE GOLD
WH = WHITE
ABK = BLACK ON BLACK
BK = BLACK
C = CLEAR
HZ = MATTE SILVER