


LRD SERIES RESIDENTIAL LIGHTING

- LRD-10W-27K-4WTRPH
- LRD-10W-30K-4WTRPH
- LRD-10W-35K-4WTRPH
- LRD-10W-40K-4WTRPH
- LRD-10W-50K-4WTRPH

4" LED ARCHITECTURAL WINGED PIN HOLE RECESSED LIGHTS



WHITE



BLACK

Ideal for New as well as old residential and commercial constructions.

Features

- 4" LED Pin Hole Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included Wwith Fixture

Technical Specifications

Electrical:

- Voltage: 120VAC
- Wattage: 10W
- Power Factor: >0.90
- Efficacy: Up to 70 LM/W

Mechanical:

- Up to 9 AWG18 Wires
- Die-cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- Type IC Rated: Approved for Direct Contact With Insulation
- Operating Temperature: 104°F
- Air-Tight and Type IC Rated: No housing Required
- Damp Location Approved
- 5-Year Warranty

Other Models:





- 7W | 490LM | LRD-10W-27K-4WTRPH-WH/BK
- 7W | 490LM | LRD-10W-30K-4WTRPH-WH/BK
- 7W | 490LM | LRD-10W-35K-4WTRPH-WH/BK
- 7W | 490LM | LRD-10W-40K-4WTRPH-WH/BK
- 7W | 490LM | LRD-10W-50K-4WTRPH-WH/BK

Customer Name: _____

Project Name: _____

Note: _____

Type: _____



6 3/5" (H) X 5" (D)
Box Dimensions:
 5-1/4" x 1-5/8" x 1-1/8"
Junction Area Dimensions:
 2-1/16" x 1-5/8" x 1-1/8"

Lighting:



- Dimming: Dimmable Down to 10% Using Standard TRIAC LED Dimmer
- Total Lumens: 700LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering index: >90
- Beam Angle: 10°
- Lifespan: 50,000 Hrs.

Applications:


- Ideal for New as well as old residential and commercial constructions.



Photometrics: LRD-10W-4WTRPH



BUG Rating: B1-U2-G0

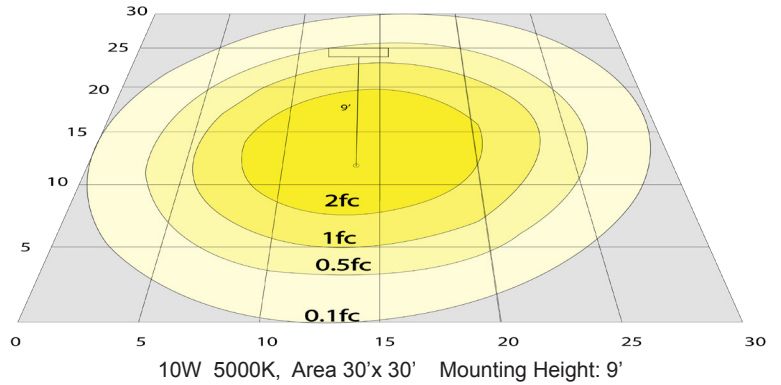

Other Views:



LRD-WTR4PH-WH
 LRD-WTR4PH-WH
 LRD-WTR4PH-WH
 LRD-WTR4PH-WH
 LRD-WTR4PH-WH

LRD-EGN-10W-27K-D
 LRD-EGN-10W-30K-D
 LRD-EGN-10W-35K-D
 LRD-EGN-10W-40K-D
 LRD-EGN-10W-50K-D

LRD-10W-27K-4WTRPH-WH
 LRD-10W-30K-4WTRPH-WH
 LRD-10W-35K-4WTRPH-WH
 LRD-10W-40K-4WTRPH-WH
 LRD-10W-50K-4WTRPH-WH



LRD-WTR4PH-BK
 LRD-WTR4PH-BK
 LRD-WTR4PH-BK
 LRD-WTR4PH-BK
 LRD-WTR4PH-BK

LRD-EGN-10W-27K-D
 LRD-EGN-10W-30K-D
 LRD-EGN-10W-35K-D
 LRD-EGN-10W-40K-D
 LRD-EGN-10W-50K-D

LRD-10W-27K-4WTRPH-BK
 LRD-10W-30K-4WTRPH-BK
 LRD-10W-35K-4WTRPH-BK
 LRD-10W-40K-4WTRPH-BK
 LRD-10W-50K-4WTRPH-BK

Performance Table: LRD-10W-4WTR


MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-10W-27K-4WTRPH	10W	120V	700LM	2700K	B1-U2-G0	70
LRD-10W-30K-4WTRPH				3000K		
LRD-10W-35K-4WTRPH				3500K		
LRD-10W-40K-4WTRPH				4000K		
LRD-10W-50K-4WTRPH				5000K		




Accessory:

Blank = No Option For Accessories
 LRD-FGL = LRD SERES FROSTED GUASS LENS
 RSL4-RI-13 = 4" ROUND ROUGH-IN PLATE, 13" LONG
 RSL4-RI = 4" ROUND ROUGH-IN PLATE, 26" LONG

Accessory:



LRD-FGL



RSL4-RI-13
 4" Round Rough-in Plate,
 13" Long



RSL4-RI
 4" Round Rough-in Plate,
 26" Long

Sample Ordering

Model	Wattage	Color Temp.	Size	Size
LRD	10W	<input type="text"/>	4WTRPH	<input type="text"/>
		27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K		WH = WHITE BK = BLACK

