# RD SERIES RESIDENTIAL LIGHTING

LRD-10W-MCT5-3WTR

3" LED ARCHITECTURAL WINGED OPEN RECESSED LIGHTS

Multi Color Temperature (Selectable)



**CLEAR** 

MATTE SILVER

Project Name: Note: Type: 3/5" Ø 1.95" ø2.09"

> 3 3/4"(H) X 3 1/4"(D) **Box Dimensions:** 5-1/4" x 1-5/8" x 1-1/8" **Junction Area Dimensions:** 2-1/16" x 1-5/8" x 1-1/8"

Ideal for New as well as old residential and commercial constructions.

## eatures

**BLACK** 

- 3" (2-1/8" Actual) LED Winded Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty

**Customer Name:** 

Junction Box Included With Fixture

## **Technical Specifications**

#### **Electrical:**

Voltage: 120VAC Wattage: 10W Power Factor: >0.90 Efficacy: Up to 70 LM/W

#### Mechanical:

- Up to 9 AWG18 Wires
- Die-Cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- Type IC rated: Approved for Direct Contact With Insulation
- Operating Temperature: 104°F
- Lifespan: 50,000 Hrs.
- Air-Tight and Type IC Rated: No Housing Required
- **Damp Location Approved**

## **Lighting:**

- Multi CCT (Selectable Switch on the Back of The Driver)
- Dimming: Dimmable Down to 10% Using Standard TRIAC LED Dimmer
- Total lumens: 700LM
- Color Temperature:
  - 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: >90
- Beam Angle: 24°

### **Applications:**

Ideal for New as well as old residential and commercial constructions.

#### Other Models:

7W | 490LM | LRD-7W-MCT5-3WTR-MG/WH/ABK/BK/C/HZ















#### Photometrics: LRD-10W-MCT5-3WTR



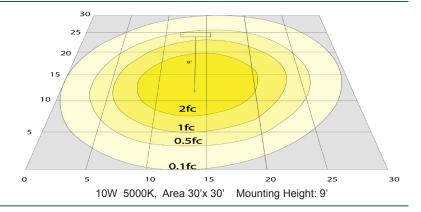

#### **Other Views:**









LRD-WTR3-MG

LRD-EGN-10W-MCT5-D

LRD-10W-MCT4-3WTR-MG











LRD-WTR3-WH

LRD-EGN-10W-MCT5-D

LRD-10W-MCT5-3WTR-WH











LRD-WTR3-ABK

LRD-EGN-10W-MCT5-D

LRD-10W-MCT5-3WTR-ABK











LRD-WTR3-BK

LRD-EGN-10W-MCT5-D

LRD-10W-MCT5-3WTR-BK





LRD-WTR3-C

LRD-EGN-10W-MCT5-D

LRD-10W-MCT5-3WTR-C



LRD-WTR3-HZ

LRD-EGN-10W-MCT5-D

LRD-10W-MCT5-3WTR-HZ

### Performance Table: LRD-10W-MCT5-3WTR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-10W-MCT5-3WTR	10W	120V	700LM	2700K	B1-U2-G0	70
				3000K		
				3500K		
				4000K		
				5000K		

### Accessory:

Blank = No Option For Accessories LRD-FGL = LRD SERES FROSTED GUASS LENS

#### Accessory:



LRD-FGL

# Sample Ordering

Model Wattage Color Temp. Size Housing

LRD = 10W = MCT5 = 3WTR = MG = MATTE GOLD
WH = WHITE
ABK = BLACK ON BLACK
BK = BLACK
C = CLEAR
HZ = MATTE SILVER



