LRD SERIES RESIDENTIAL LIGHTING


LRD-10W-MCT5-4WTRSL

4" LED ARCHITECTURAL WINGED SLOT RECESSED LIGHTS Multi Color Temperature (Selectable)






Project Name: Note: Type: 2 1/3"



Customer Name:



6 1/3"(H) X 5"(D) **Box Dimensions:** 5-1/4" x 1-5/8" x 1-1/8" Junction Area Dimensions: 2-1/16" x 1-5/8" x 1-1/8"

Ideal for New as well as old residential and commercial constructions.

eatures

- 4" LED Slot Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

echnical Specifications

Electrical:

Voltage: 120VAC Wattage: 10W Power factor: >0.90 Efficacy: Up to 70 LM/W

Mechanical:

- Up to 9 AWG18 Wires
- Die-Cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- Type IC Rated: Approved For Direct Wontact With Insulation
- Operating Temperature: 104°F
- Air-Tight And Type IC Rated: No Housing Required
- Damp Location Approved
- 5-Year Warranty

Lighting:

- Multi CCT (Selectable Switch on the Back of the
- Dimming: Dimmable Down to 10% Using Standard TRIAC LED Dimmer
 - Total Lumens: 700LM
- Color Temperature:
 - 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: >90
- Beam Angle: 10°
- Lifespan: 50,000 Hrs.

Applications:

Ideal for New as well as old residential and commercial constructions.

Other Models:

7W | 490LM | LRD-10W-MCT5-4WTRSL-WH/BK














Photometrics: LRD-10W-4WTRSL 15

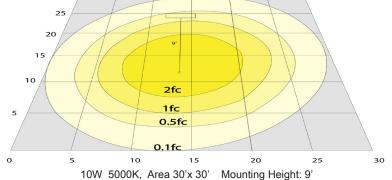

BUG Rating: B1-U2-G0

Other Views:



Performance Table: LRD-10W-MCT5-4WTRSL

LRD-WTR4SL-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-10W-MCT5-4WTRSL	10W	120V	700LM	2700K	B1-U2-G0	70
				3000K		
				3500K		
				4000K		
				5000K		

Accessory:

Blank = No Option For Accessories LRD-FGL = LRD SERES FROSTED GUASS LENS RSL4-RI-13 = 4" ROUND ROUGH-IN PLATE, 13" LONG RSL4-RI = 4" ROUND ROUGH-IN PLATE, 26" LONG

Accessory:





LRD-FGL

RSL4-RI-13
4" Round Rough-in Plate,
13" Long



RSL4-RI 4" Round Rough-in Plate, 26" Long

Sample Ordering

Model Wattage Color Temp. Size Housing

LRD = 10W = MCT5 = 4WTRSL = WH = WHITE BK = BLACK



