
LRD SERIES RESIDENTIAL LIGHTING



LRD-10W-MCT5-WTM1 LED ARCHITECTURAL RECESSED LIGHTS Multi Color Temperature (Selectable)



Customer Name: Project Name: Note: Type:

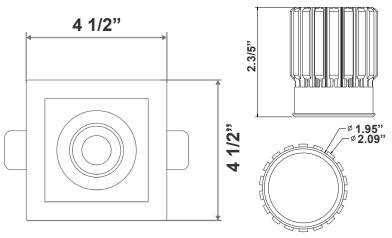

Ideal for New as well as old residential and commercial constructions.

4 1/2"(H) X 4 1/2"(W) **Box Dimensions:** 5-1/4" x 1-5/8" x 1-1/8" **Junction Area Dimensions:** 2-1/16" x 1-5/8" x 1-1/8"

eatures

- LED Architectural Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

echnical Specifications

Electrical:

Voltage: 120VAC Wattage: 10W Power Factor: >0.90 Efficacy: Up to 70 LM/W

Mechanical:

- Up to 9 AWG18 Wires
- Die-cast Aluminum With white Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- Type IC Rated: Approved for Direct Contact With
- Operating Temperature: 104°F
- Air-Tight and Type IC Rated: No housing Required
- Damp Location Only
- 5-Year Warranty

Lighting:

- Multi CCT (Selectable Switch On the Back Of The
- Dimming: Dimmable Down to 10% Using Standard TRIAC LED Dimmer
- Total Lumens: 700LM
- Color Temperature:
 - 2700K/3000K/3500K/4000K/5000K
- Color Rendering index: >90
- Beam Angle: 30°
- Lifespan: 50,000 Hrs.

Applications:

Ideal for New as well as old residential and commercial constructions.

Other Models:

10W | 700LM | LRD-10W-MCT5-WTM2-WH

10W | 700LM | LRD-10W-MCT5-WTM3-WH















Photometrics: LRD-10W-MCT5-WTM1-WH



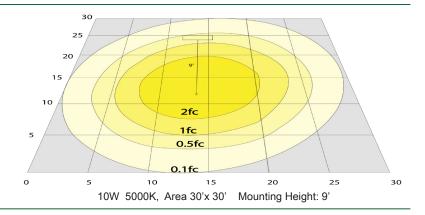

Other Views:











LRD-WTM1-WH

LRD-EGN-10W-MCT5-D

LRD-10W-MCT5-WTM1-WH

Performance Table: LRD-10W-MCT5WTM1-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-10W-MCT5-WTM1-WH	10W	120V	700LM	2700K		70
				3000K	B1-U2-G0	
				3500K		
				4000K		
				5000K		

Accessory:

Blank = No Option For Accessories LRD-FGL = LRD SERES FROSTED GUASS LENS

Accessory:



LRD-FGI

Sample Ordering

Model	Wattage		C	Color Ten	Size	Housing			
LRD	_	10W	_	MCT5	_	WTM1	_	WH	





