RD SERIES RESIDENTIAL LIGHTING



LRD-10W-MCT5-WTM3 LED ARCHITECTURAL RECESSED LIGHTS Multi Color Temperature (Selectable)

Project Name: Note: Type: 11 1/5" 4 1/2" Ø 1.95" Ø 2.09" 1 2/3"

> 4 1/2"(H) X 11 1/5"(W) X 1 2/3"(D) **Box Dimensions:** 5-1/4" x 1-5/8" x 1-1/8"

Junction Area Dimensions:

2-1/16" x 1-5/8" x 1-1/8"



Ideal for New as well as old residential and commercial constructions.

eatures

- LED Architectural Recessed Trim
- Die-cast Aluminum with white powder coat finish
- 5-Year Warranty

Customer Name:

Junction Box Included With Fixture

echnical Specifications

Electrical:

Voltage: 120VAC Wattage: 10W

Power Factor: >0.90

Efficacy: Up to 70 LM/W

Mechanical:

- Up to 9 AWG18 Wires
- Die-Cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- Type IC Rated: Approved For Direct Contact With Insulation
- Operating Temperature: 104°F
- Air-Tight and Type IC Rated: No Housing Required
- **Damp Location Only**
- 5-Year Warranty

Lighting:

- Multi CCT (Selectable Switch on the Back of the Driver)
- Dimming: Dimmable down to 10% Wsing Standard TRIAC LED Dimmer
- Total lumens: 700LM
- Color Temperature:
 - 2700K/3000K/3500K/4000K/5000K
- Color Rendering index: >90
- Beam Angle: 30°
- Lifespan: 50,000 Hrs.

Applications:

Ideal for New as well as old residential and commercial constructions.

Other Models:

10W | 700LM | LRD-10W-MCT5-WTM1-WH

10W | 700LM | LRD-10W-MCT5-WTM2-WH















Photometrics: LRD-10W-WTM3-WH



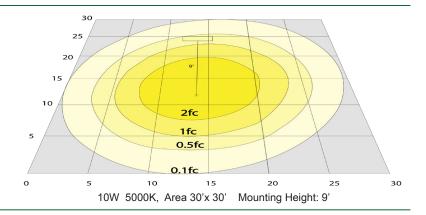

Other Views:



LRD-WTM3-WH LRD-EGN-10W-MCT5-D LRD-10W-MCT5-WTM3-WH

Performance Table: LRD-10W-MCT5-WTM3-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
	10W	120V	700LM	2700K		70
				3000K		
LRD-10W-MCT5-WTM3-WH				3500K	B1-U2-G0	
				4000K		
				5000K		

Accessory:

Blank = No Option For Accessories LRD-FGL = LRD SERES FROSTED GUASS LENS

Accessory:



LRD-FG

Sample Ordering

Model	Wattage		Color Temp.			Size	Housing	
LRD	_	10W	_	MCT5	_	WTM3	_	WH



