

# LRD SERIES RESIDENTIAL LIGHTING

LRD-7W-27K-3WTRSL  
LRD-7W-30K-3WTRSL  
LRD-7W-35K-3WTRSL  
LRD-7W-40K-3WTRSL  
LRD-7W-50K-3WTRSL

3" LED ARCHITECTURAL WINGED SLOT RECESSED LIGHTS

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_


Note: \_\_\_\_\_

Type: \_\_\_\_\_



WHITE

BLACK

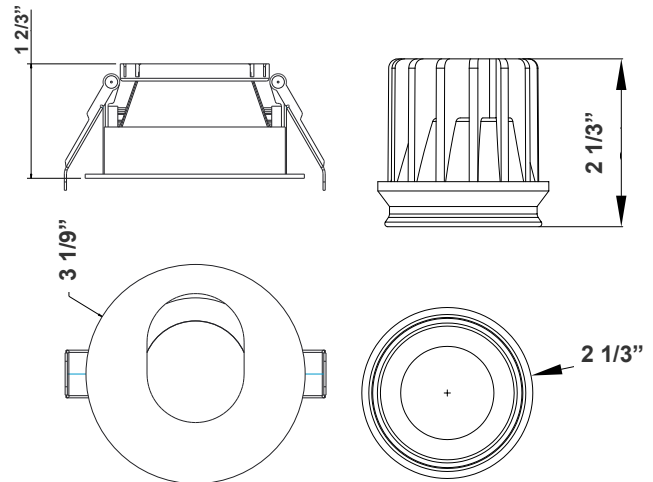

3 3/4" (H) X 3 1/9" (D)  
Box Dimensions:  
5-1/4" x 1-5/8" x 1-1/8"  
Junction Area Dimensions:  
2-1/16" x 1-5/8" x 1-1/8"

Ideal for New as well as old residential and commercial constructions.

## Features

- 3" (2-1/8" Actual) LED Slot Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

## Technical Specifications

### Electrical:

- Voltage: 120VAC
- Wattage: 7W
- Power Factor: >0.90
- Efficacy: Up to 70 LM/W

### Mechanical:

- Up to 9 AWG18 Wires
- Die-cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- Type IC Rated: Approved for Direct Contact With Insulation
- Operating Temperature: 104°F
- Air-Tight and Type IC Rated: No Housing Required
- Damp Location Approved
- 5-Year Warranty

### Lighting:

- Dimming: Dimmable Down to 10% Using Standard TRIAC LED Dimmer
- Total Lumens: 490LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: >90
- Beam Angle: 10°
- Lifespan: 50,000 Hrs.

### Applications:



- Ideal for New as well as old residential and commercial constructions.

### Other Models:


- 10W | 700LM | LRD-10W-27K-3WTRSL-WH/BK
- 10W | 700LM | LRD-10W-30K-3WTRSL-WH/BK
- 10W | 700LM | LRD-10W-35K-3WTRSL-WH/BK
- 10W | 700LM | LRD-10W-40K-3WTRSL-WH/BK
- 10W | 700LM | LRD-10W-50K-3WTRSL-WH/BK



**Photometrics:** LRD-7W-3WTRSL

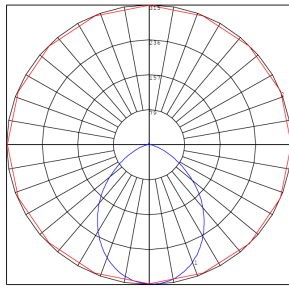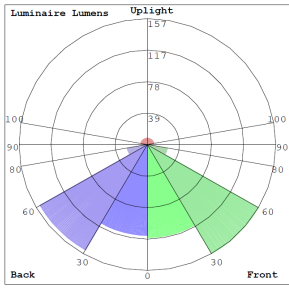

BUG Rating: B1-U1-G0

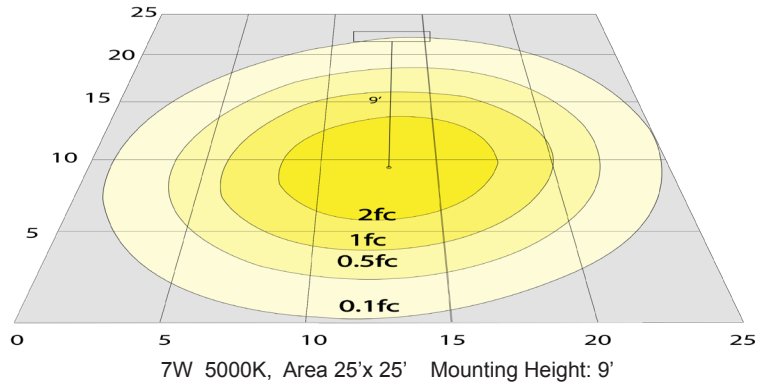

7W 5000K, Area 25'x 25' Mounting Height: 9'

**Other Views:**



LRD-WTR3SL-WH  
 LRD-WTR3SL-WH  
 LRD-WTR3SL-WH  
 LRD-WTR3SL-WH  
 LRD-WTR3SL-WH

LRD-EGN-7W-27K-D  
 LRD-EGN-7W-30K-D  
 LRD-EGN-7W-35K-D  
 LRD-EGN-7W-40K-D  
 LRD-EGN-7W-50K-D

LRD-7W-27K-3WTRSL-WH  
 LRD-7W-30K-3WTRSL-WH  
 LRD-7W-35K-3WTRSL-WH  
 LRD-7W-40K-3WTRSL-WH  
 LRD-7W-50K-3WTRSL-WH



LRD-WTR3SL-BK  
 LRD-WTR3SL-BK  
 LRD-WTR3SL-BK  
 LRD-WTR3SL-BK  
 LRD-WTR3SL-BK

LRD-EGN-7W-27K-D  
 LRD-EGN-7W-30K-D  
 LRD-EGN-7W-35K-D  
 LRD-EGN-7W-40K-D  
 LRD-EGN-7W-50K-D

LRD-7W-27K-3WTRSL-BK  
 LRD-7W-30K-3WTRSL-BK  
 LRD-7W-35K-3WTRSL-BK  
 LRD-7W-40K-3WTRSL-BK  
 LRD-7W-50K-3WTRSL-BK

**Performance Table:** LRD-7W-3WTRSL

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-7W-27K-3WTRSL	7W	120V	490LM	2700K	B1-U1-G0	70
LRD-7W-30K-3WTRSL				3000K		
LRD-7W-35K-3WTRSL				3500K		
LRD-7W-40K-3WTRSL				4000K		
LRD-7W-50K-3WTRSL				5000K		



## Accessory:

Blank = No Option For Accessories  
LRD-FGL = LRD SERIES FROSTED GUASS LENS

## Accessory:



LRD-FGL

## Sample Ordering

Model	Wattage	Color Temp.	Size	Size
LRD	7W	<input type="text"/>	3WTRSL	<input type="text"/>
		27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K		WH = WHITE BK = BLACK

