LRD SERIES RESIDENTIAL LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!


LRD-7W-27K-3WTRSL
LRD-7W-30K-3WTRSL
LRD-7W-35K-3WTRSL
LRD-7W-40K-3WTRSL
LRD-7W-50K-3WTRSL

3" LED ARCHITECTURAL WINGED SLOT RECESSED LIGHTS

Customer Name:
Project Name:
Note: | Type:



WHITE BLACK

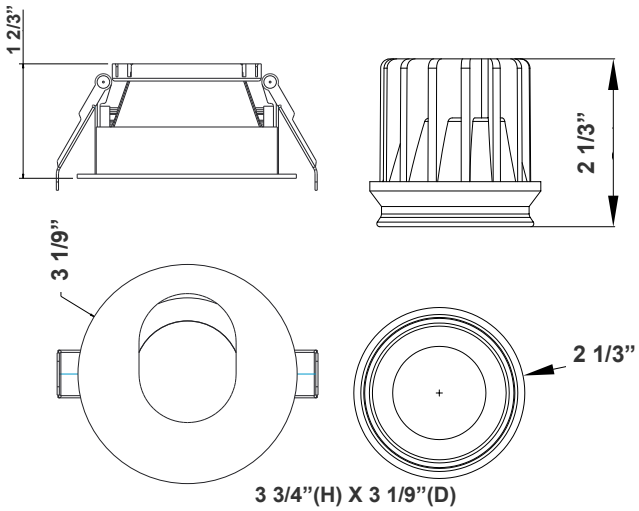

3 3/4"(H) X 3 1/9"(D)
Box Dimensions:
5-1/4" x 1-5/8" x 1-1/8"
Junction Area Dimensions:
2-1/16" x 1-5/8" x 1-1/8"

Ideal for New as well as old residential and commercial constructions.

Features

- 3" (2-1/8" Actual) LED Slot Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

Technical Specifications

Electrical:

- Voltage: 120VAC
- Wattage: 7W
- Power Factor: >0.90
- Efficacy: Up to 70 LM/W

Mechanical:

- Up to 9 AWG18 Wires
- Die-cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- Operating Temperature: 104°F
- IC-Rated, No Housing Required
- Damp Location Approved
- 5-Year Warranty

Lighting:

- Dimming: Dimmable Down to 10% Using Standard TRIAC LED Dimmer
- Total Lumens: 490LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: >90
- Beam Angle: 10°
- Lifespan: 50,000 Hrs.


Applications:

- Ideal for New as well as old residential and commercial constructions.


Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

WG-ZY-Z4-2Z

Photometrics: LRD-7W-3WTRSL

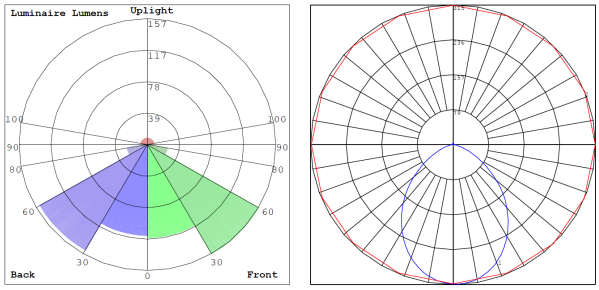

BUG Rating: B1-U1-G0

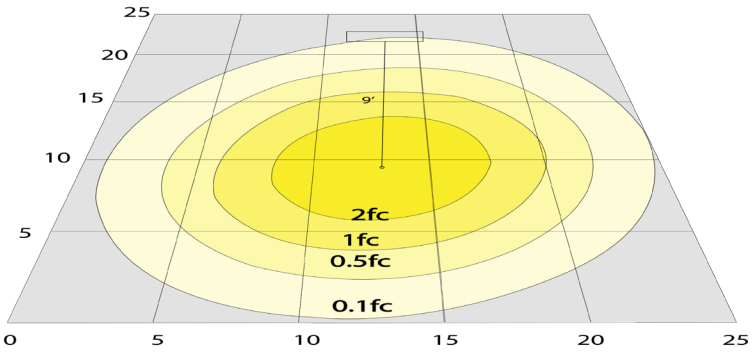

7W 5000K, Area 25'x 25' Mounting Height: 9'

Other Views:



LRD-WTR3SL-WH
LRD-WTR3SL-WH
LRD-WTR3SL-WH
LRD-WTR3SL-WH
LRD-WTR3SL-WH

LRD-EGN-7W-27K-D
LRD-EGN-7W-30K-D
LRD-EGN-7W-35K-D
LRD-EGN-7W-40K-D
LRD-EGN-7W-50K-D

LRD-7W-27K-3WTRSL-WH
LRD-7W-30K-3WTRSL-WH
LRD-7W-35K-3WTRSL-WH
LRD-7W-40K-3WTRSL-WH
LRD-7W-50K-3WTRSL-WH



LRD-WTR3SL-BK
LRD-WTR3SL-BK
LRD-WTR3SL-BK
LRD-WTR3SL-BK
LRD-WTR3SL-BK

LRD-EGN-7W-27K-D
LRD-EGN-7W-30K-D
LRD-EGN-7W-35K-D
LRD-EGN-7W-40K-D
LRD-EGN-7W-50K-D

LRD-7W-27K-3WTRSL-BK
LRD-7W-30K-3WTRSL-BK
LRD-7W-35K-3WTRSL-BK
LRD-7W-40K-3WTRSL-BK
LRD-7W-50K-3WTRSL-BK


Performance Table: LRD-7W-3WTRSL

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-7W-27K-3WTRSL	7W	120V	490LM	2700K	B1-U1-G0	70
LRD-7W-30K-3WTRSL				3000K		
LRD-7W-35K-3WTRSL				3500K		
LRD-7W-40K-3WTRSL				4000K		
LRD-7W-50K-3WTRSL				5000K		

Accessory:

Blank = No Option For Accessories
LRD-FGL = LRD SERES FROSTED GUASS LENS
RSL3-RI = 3" ROUND ROUGH-IN PLATE, 26" LONG

Accessory:



LRD-FGL



RSL3-RI
3" Round Rough-in Plate,26" long

Sample Ordering

Model		Wattage		Color Temp.		Size		Size
LRD	-	7W	-		-	3WTRSL	-	

27K = 2700K
30K = 3000K
35K = 3500K
40K = 4000K
50K = 5000K

WH = WHITE
BK = BLACK