

# LRD SERIES RESIDENTIAL LIGHTING



LRD-7W-MCT5-4WTRSL  
4" LED ARCHITECTURAL WINGED SLOT RECESSED LIGHTS  
MCT Multi Color Temperature (Selectable)

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ Type: \_\_\_\_\_

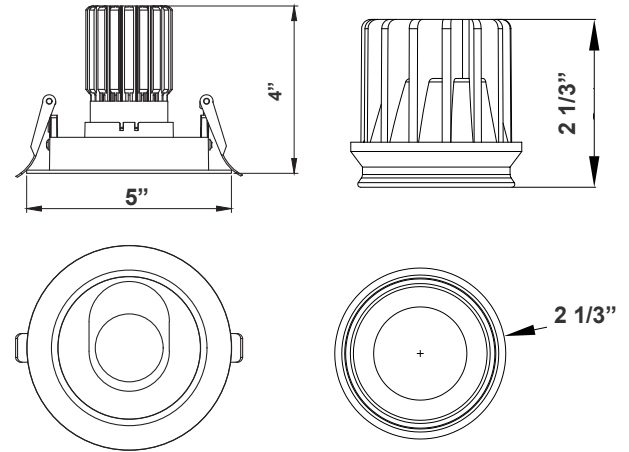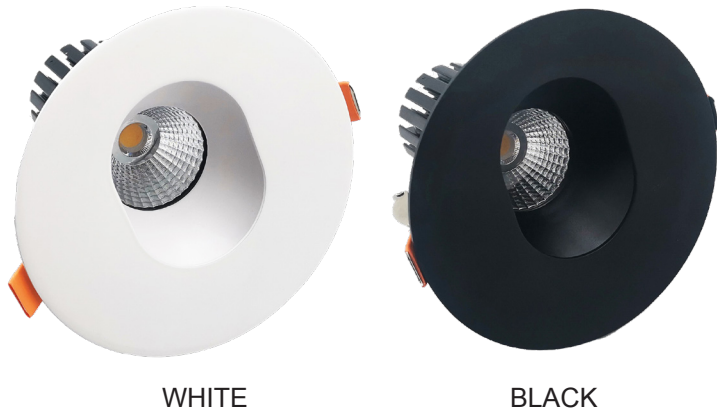

6 1/3" (H) X 5" (D)  
Box Dimensions:  
5-1/4" x 1-5/8" x 1-1/8"  
Junction Area Dimensions:  
2-1/16" x 1-5/8" x 1-1/8"

Ideal for New as well as old residential and commercial constructions.

## Features

- 4" LED Slot Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

## Technical Specifications

### Electrical:

- Voltage: 120VAC
- Wattage: 7W
- Power Factor: >0.90
- Efficacy: Up to 70 LM/W

### Mechanical:

- Up to 9 AWG18 Wires
- Die-cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- Type IC Rated: Approved For Direct Contact With Insulation
- Operating Temperature: 104°F
- Air-Tight and Type IC Rated: No Housing Required
- Damp Location Approved

### Lighting:

- Multi CCT (Selectable Switch on the Back of The Driver)
- Dimming: Dimmable Down to 10% Using Standard TRIAC LED dimmer
- Total lumens: 490LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering index: >90
- Beam Angle: 10°
- Lifespan: 50,000 Hrs.

### Applications:

- Ideal for New as well as old residential and commercial constructions.

### Other Models:



- 10W | 700LM | LRD-10W-MCT5-4WTRSL-WH/BK




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



## Photometrics: LRD-7W-MCT5-4WTRSL

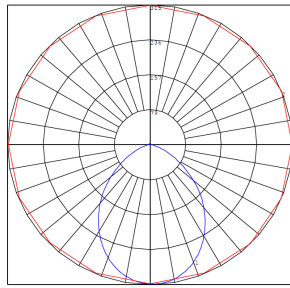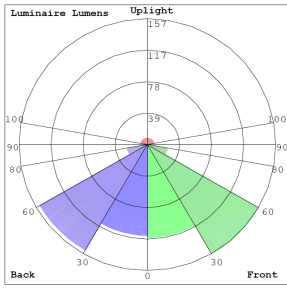

BUG Rating: B1-U1-G0

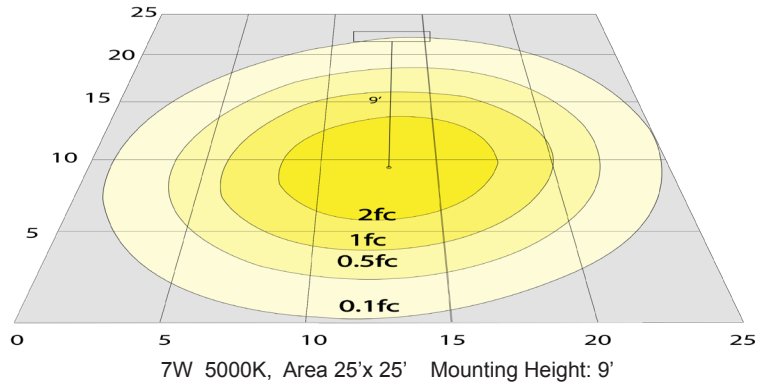

7W 5000K, Area 25'x 25' Mounting Height: 9'

## Other Views:



LRD-WTR4SL-WH



LRD-EGN-7W-MCT5-D




LRD-7W-MCT5-4WTRSL-WH



LRD-WTR4SL-BK



LRD-EGN-MCT5-27K-D

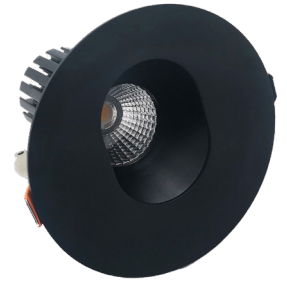

LRD-7W-MCT5-4WTRSL-BK

## Performance Table: LRD-7W-MCT5-4WTRSL


MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-7W-MCT5-4WTRSL	7W	120V	490LM	2700K	B1-U1-G0	70
				3000K		
				3500K		
				4000K		
				5000K		

## Accessory:



Blank = No Option For Accessories  
 LRD-FGL = LRD SERIES FROSTED GUASS LENS  
 RSL4-RI-13 = 4" ROUND ROUGH-IN PLATE, 13" LONG  
 RSL4-RI = 4" ROUND ROUGH-IN PLATE, 26" LONG

## Accessory:



LRD-FGL



RSL4-RI-13  
4" Round Rough-in Plate,  
13" Long



RSL4-RI  
4" Round Rough-in Plate,  
26" Long

## Sample Ordering

Model	Wattage	Color Temp.	Size	Housing				
LRD	-	7W	-	MCT5	-	4WTRSL	-	
WH = WHITE BK = BLACK								

