LRD SERIES RESIDENTIAL LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LRD-TL-10W-27K-4S
LRD-TL-10W-27K-4S
LRD-TL-10W-35K-4S
LRD-TL-10W-40K-4S
LRD-TL-10W-50K-4S

4" LED ARCHITECTURAL TRIMLESS SQUARE RECESSED LIGHTS


Customer Name:


Project Name:


Note: | Type:



MATTE GOLD


WHITE


BLACK


CLEAR


MATTE SILVER

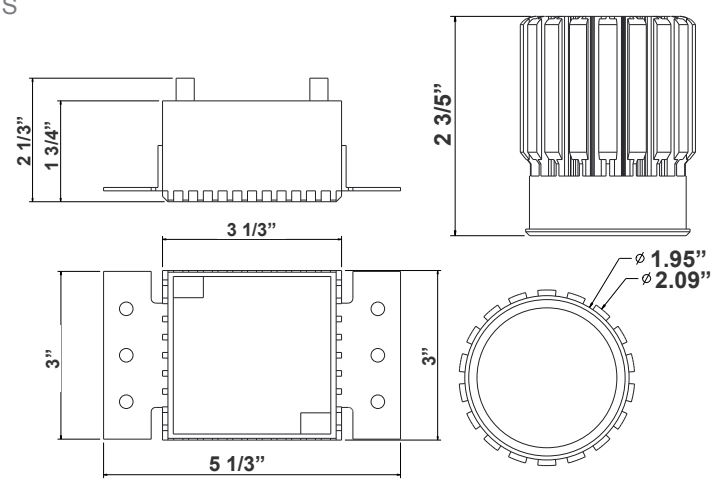

4 3/4"(H) X 5 1/3"(W)
Box Dimensions:
5-1/4" x 1-5/8" x 1-1/8"
Junction Area Dimensions:

Ideal for New as well as old residential and commercial constructions.

Features

- 4" (3-1/4" Actual) LED Timeless SQUARE Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

Technical Specifications

Electrical:

- Voltage: 120VAC
- Wattage: 10W
- Power Factor: >0.90
- Efficacy: Up To 70 LM/W

Mechanical:

- Up to 9 AWG18 Wires
- Flanges can be adjusted for plaster up to 5/8" Thick
- Die-cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Rated Up to 9 AWG18 Wires
- Operating temperature: 104°F
- IC-Rated, No Housing Required
- Damp Location Approved
- 5-Year Warranty

Lighting:

- Dimming: Dimmable Down to 10% Using Standard TRIAC LED dimmer
- Total Lumens: 700LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering index: >90
- Beam Angle: 30°
- Lifespan: 50,000 Hrs.


Applications:

- Ideal for New as well as old residential and commercial constructions.


Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

WG-ZY-Z4-2Z

Photometrics: LRD-TL-10W-4S

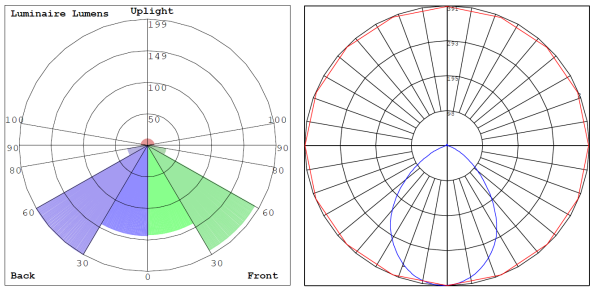

BUG Rating: B1-U2-G0

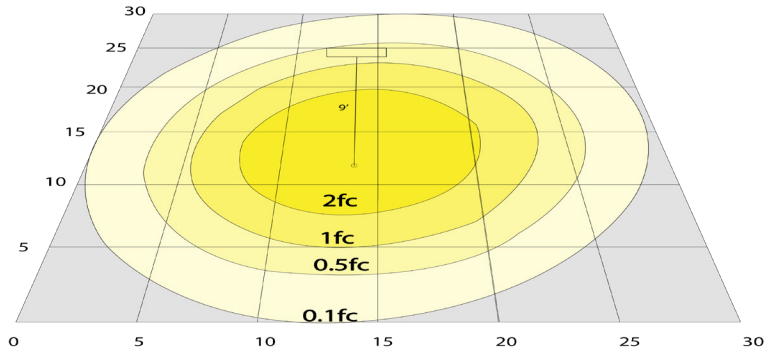

10W 5000K, Area 30'x 30' Mounting Height: 9'

Other Views:



LRD-TLTS4-MG	LRD-TLHS4-WH	LRD-EGN-10W-27K-D	LRD-TL-10W-27K-4S-MG
LRD-TLTS4-MG	LRD-TLHS4-WH	LRD-EGN-10W-30K-D	LRD-TL-10W-30K-4S-MG
LRD-TLTS4-MG	LRD-TLHS4-WH	LRD-EGN-10W-35K-D	LRD-TL-10W-35K-4S-MG
LRD-TLTS4-MG	LRD-TLHS4-WH	LRD-EGN-10W-40K-D	LRD-TL-10W-40K-4S-MG
LRD-TLTS4-MG	LRD-TLHS4-WH	LRD-EGN-10W-50K-D	LRD-TL-10W-50K-4S-MG



LRD-TLTS4-WH	LRD-TLHS4-WH	LRD-EGN-10W-27K-D	LRD-TL-10W-27K-4S-WH
LRD-TLTS4-WH	LRD-TLHS4-WH	LRD-EGN-10W-30K-D	LRD-TL-10W-30K-4S-WH
LRD-TLTS4-WH	LRD-TLHS4-WH	LRD-EGN-10W-35K-D	LRD-TL-10W-35K-4S-WH
LRD-TLTS4-WH	LRD-TLHS4-WH	LRD-EGN-10W-40K-D	LRD-TL-10W-40K-4S-WH
LRD-TLTS4-WH	LRD-TLHS4-WH	LRD-EGN-10W-50K-D	LRD-TL-10W-50K-4S-WH



LRD-TLTS4-BK	LRD-TLHS4-WH	LRD-EGN-10W-27K-D	LRD-TL-10W-27K-4S-BK
LRD-TLTS4-BK	LRD-TLHS4-WH	LRD-EGN-10W-30K-D	LRD-TL-10W-30K-4S-BK
LRD-TLTS4-BK	LRD-TLHS4-WH	LRD-EGN-10W-35K-D	LRD-TL-10W-35K-4S-BK
LRD-TLTS4-BK	LRD-TLHS4-WH	LRD-EGN-10W-40K-D	LRD-TL-10W-40K-4S-BK
LRD-TLTS4-BK	LRD-TLHS4-WH	LRD-EGN-10W-50K-D	LRD-TL-10W-50K-4S-BK

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



LRD-TLTS4-C
LRD-TLTS4-C
LRD-TLTS4-C
LRD-TLTS4-C
LRD-TLTS4-C

+




LRD-TLHS4-WH
LRD-TLHS4-WH
LRD-TLHS4-WH
LRD-TLHS4-WH
LRD-TLHS4-WH

+



LRD-EGN-10W-27K-D
LRD-EGN-10W-30K-D
LRD-EGN-10W-35K-D
LRD-EGN-10W-40K-D
LRD-EGN-10W-50K-D

=



LRD-TL-10W-27K-4S-C
LRD-TL-10W-30K-4S-C
LRD-TL-10W-35K-4S-C
LRD-TL-10W-40K-4S-C
LRD-TL-10W-50K-4S-C



LRD-TLTS4-HZ
LRD-TLTS4-HZ
LRD-TLTS4-HZ
LRD-TLTS4-HZ
LRD-TLTS4-HZ

+




LRD-TLHS4-WH
LRD-TLHS4-WH
LRD-TLHS4-WH
LRD-TLHS4-WH
LRD-TLHS4-WH

+



LRD-EGN-10W-27K-D
LRD-EGN-10W-30K-D
LRD-EGN-10W-35K-D
LRD-EGN-10W-40K-D
LRD-EGN-10W-50K-D

=



LRD-TL-10W-27K-4S-HZ
LRD-TL-10W-30K-4S-HZ
LRD-TL-10W-35K-4S-HZ
LRD-TL-10W-40K-4S-HZ
LRD-TL-10W-50K-4S-HZ

Performance Table: LRD-TL-10W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-TL-10W-27K-4S	10W	120V	700LM	2700K	B1-U2-G0	70
LRD-TL-10W-30K-4S				3000K		
LRD-TL-10W-35K-4S				3500K		
LRD-TL-10W-40K-4S				4000K		
LRD-TL-10W-50K-4S				5000K		

Accessory:

Blank = No Option For Accessories
LRD-FGL = LRD SERES FROSTED GUASS LENS

Accessory:



LRD-FGL

Sample Ordering

Model		Timeless		Wattage		Color Temp.		Size		Size
LRD	-	TL	-	10W	-		-	4S	-	

27K = 2700K
30K = 3000K
35K = 3500K
40K = 4000K
50K = 5000K

MG = MATTE GOLD
WH = WHITE
BK = BLACK
C = CLEAR
HZ = MATTE SILVER