

LRLVT SERIES

INDUSTRIAL LIGHTING

LRLVT-8FT-4L


Lamp-Ready 8ft 4-Lamp Linear Vapor Tight (7 in Wide)



Front View



Inside View

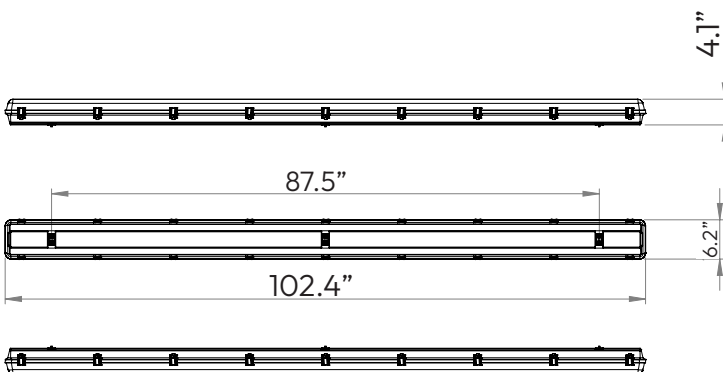

Technical Drawing: 4.1" (D) x 102.4" (W) x 6.2" (H)

Customer Name:

Project Name:

Note:

Type:

The LRLVT Series lamp-ready linear vapor tight fixtures provide a durable sealed housing designed for use with LED T8 tubes. Built with a rugged polycarbonate body and gasketed lens, these fixtures offer reliable performance in wet, dusty, and harsh environments. The lamp-ready design supports both single-ended and double-ended Type B LED tubes, giving installers flexibility while eliminating the need for a ballast or driver. Ideal for parking garages, warehouses, tunnels, food processing areas, and other demanding commercial or industrial applications.

FEATURES:

- Lamp-ready design for LED T8 tube installation (lamps not included)
- Compatible with Type B ballast bypass LED tubes
- Supports single-ended or double-ended power tubes
- Non-shunted G13 lamp holders
- Durable vapor-tight sealed construction for harsh environments
- IP66 rated for wet and dusty locations
- Stainless steel locking clips for secure lens sealing
- Ideal for parking garages, warehouses, tunnels, utility areas, and industrial facilities

SPECIFICATIONS:

ELECTRICAL:

- Lamp-ready fixture (no ballast or LED driver included)
- Fixture wiring supports 120-277VAC LED T8 tubes
- Compatible with single-ended or double-ended power LED tubes
- Non-shunted G13 sockets

LIGHTING:

- Designed for LED T8 replacement tubes
- Supports four 4FT LED T8 lamps
- Light output determined by installed lamps

MECHANICAL:

- Durable polycarbonate housing and lens
- Stainless steel locking clips
- Vapor-tight sealed construction
- IP66 rated
- Fixture length: 102.4 in

APPLICATIONS:

- Ideal for demanding environments requiring moisture- and dust-resistant lighting, such as parking garages, warehouses, industrial facilities, stairwells, utility rooms, food processing areas, and outdoor covered walkways. Suitable for installations where durable, lamp-ready vapor-tight fixtures are required.

PERFORMANCE TABLE

MODEL NO.	DESCRIPTION
LRLVT-8FT-4L	Lamp-Ready 8Ft 4-Lamp Linear Vapor Tight 7In Wide

COMPATIBLE T8 LAMPS

MODEL NO.	DESCRIPTION	IMAGE
T8-EZ6-GS-4FT-15W-30K-C T8-EZ6-GS-4FT-15W-35K-C T8-EZ6-GS-4FT-15W-40K-C T8-EZ6-GS-4FT-15W-50K-C T8-EZ6-GS-4FT-15W-30K-F T8-EZ6-GS-4FT-15W-35K-F T8-EZ6-GS-4FT-15W-40K-F T8-EZ6-GS-4FT-15W-50K-F	15W 1875LM 3000K Clear, G13, Type A & B 15W 1875LM 3500K Clear, G13, Type A & B 15W 1875LM 4000K Clear, G13, Type A & B 15W 1875LM 5000K Clear, G13, Type A & B 15W 1800LM 3000K Frosted, G13, Type A & B 15W 1800LM 3500K Frosted, G13, Type A & B 15W 1800LM 4000K Frosted, G13, Type A & B 15W 1800LM 5000K Frosted, G13, Type A & B	
T8-EZ6-GS-4FT-18W-30K-C T8-EZ6-GS-4FT-18W-35K-C T8-EZ6-GS-4FT-18W-40K-C T8-EZ6-GS-4FT-18W-50K-C T8-EZ6-GS-4FT-18W-30K-F T8-EZ6-GS-4FT-18W-35K-F T8-EZ6-GS-4FT-18W-40K-F T8-EZ6-GS-4FT-18W-50K-F	18W 2250LM 3000K Clear, G13, Type A & B 18W 2250LM 3500K Clear, G13, Type A & B 18W 2250LM 4000K Clear, G13, Type A & B 18W 2250LM 5000K Clear, G13, Type A & B 18W 2160LM 3000K Frosted, G13, Type A & B 18W 2160LM 3500K Frosted, G13, Type A & B 18W 2160LM 4000K Frosted, G13, Type A & B 18W 2160LM 5000K Frosted, G13, Type A & B	
T8-EZX-PRO-4FT-12W-40K-F T8-EZX-PRO-4FT-12W-50K-F	12W 1560LM 4000K Frosted, G13, Type A & B 12W 1560LM 5000K Frosted, G13, Type A & B	
T8-EZX-PRO-4FT-18W-40K-F T8-EZX-PRO-4FT-18W-50K-F T8-EZX-PRO-4FT-18W-40K-C T8-EZX-PRO-4FT-18W-50K-C	18W 2340LM 4000K Frosted, G13, Type A & B 18W 2340LM 5000K Frosted, G13, Type A & B 18W 2340LM 4000K Clear, G13, Type A & B 18W 2340LM 5000K Clear, G13, Type A & B	