

LRS SERIES

Outdoor Lighting

LED RESIDENTIAL LANTERNS WITH PHOTOCELL

LRS-A-MCT-PC

MCT Multi Color Temperature (Selectable)

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




LED Residential Lanterns With Photocell Is Ideal For General Site lighting, Loading Docks, Doorway, Pathway And Parking Areas.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

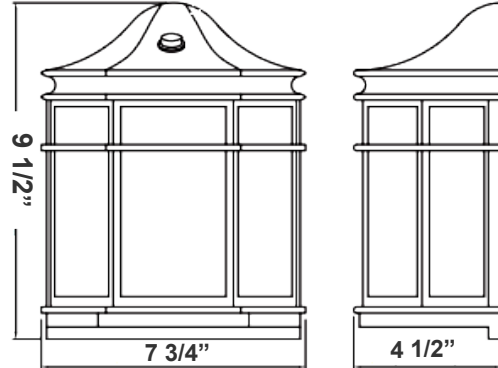

9 1/2"(L) x 7 3/4"(W) x 4 1/2"(D)

Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Includes Pre-Wired Photocell

Technical Specifications

Electrical:

- Voltage: 120V AC, 60 Hz
- Wattage: 12W
- Power Factor: 0.95
- Efficacy: 95 LM/W

Mechanical:

- Aluminum Housing With Powder Coated
- Frosted Glass Lens
- Includes Pre-Wired Photocell
- Operating Temperature: -40°F to 104°F
- Lifespan: 70,000 hr.
- IP Rating: IP65

Lighting:

- Multi CCT Switch is Inside Fixture
- LED: DOB
- Total Lumens: 1150LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >80
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

Applications:

- LED Wall Pack With Double-Walled Clear/frosted Lens Is Ideal For General Site Lighting, Loading Docks, Doorway, Pathway And Parking Areas.

Other Models:

- 6W | 550LM | LRS-B-MCT-PC




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-ZY-29-2Z

Photometrics: LRS-A-MCT-PC

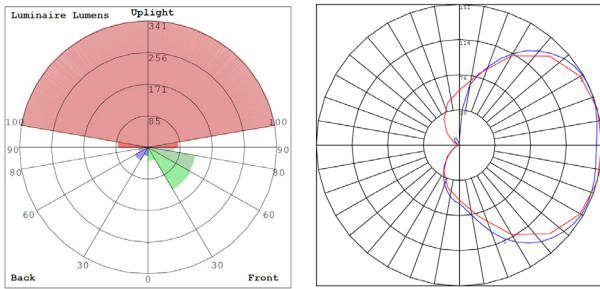

BUD Rating: B0-U3-G1

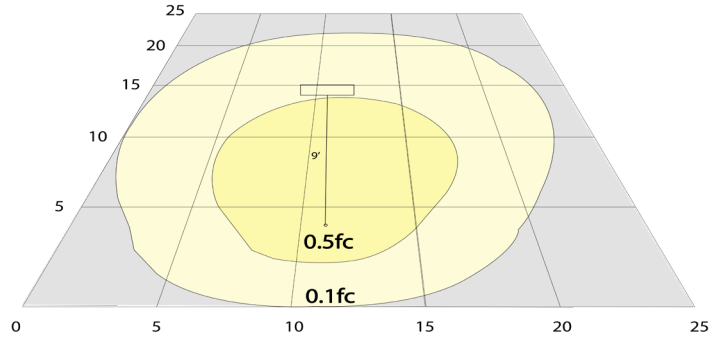

12W 4000K Area 25'x 25' Mounting Height: 9'

Other Views:



Side View



Front View



Night View

Performance Table: LRS-A-MCT-PC

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-A-MCT-PC	12W	120V	1150LM	3000K 4000K 5000K	B0-U3-G1	95

Sample Ordering

Model
Color Temp.
Housing

LRS -
 A -
 MCT -
 PC

Other Models:



LRS-B-MCT-PC

