LRS SERIES Outdoor Lighting

LED RESIDENTIAL LANTERNS WITH PHOTOCELL

WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LRS-A-MCT-PC

MCT Multi Color Temperature (Selectable)

Customer Name:

Project Name:

Note: | Type:



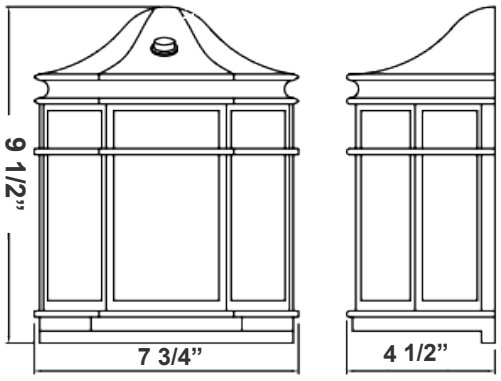

9 1/2"(L) x 7 3/4"(W) x 4 1/2"(D)

LED Residential Lanterns With Photocell Is Ideal For General Site lighting, Loading Docks, Doorway, Pathway And Parking Areas.

Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Includes Pre-Wired Photocell

Technical Specifications

Electrical:

- • Voltage: 120V AC, 60 Hz
- • Wattage: 12W
- • Power Factor: 0.95
- • Efficacy: 95 LM/W

Lighting:

- Multi CCT Switch is Inside Fixture
- LED: DOB
- Total Lumens: 1150LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >80
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

Mechanical:

- Aluminum Housing With Powder Coated
- Frosted Glass Lens
- Includes Pre-Wired Photocell
- Operating Temperature: -40°F to 104°F
- Lifespan: 70,000 hr.
- IP Rating: IP65

Applications:

- LED Wall Pack With Double-Walled Clear/frosted Lens Is Ideal For General Site Lighting, Loading Docks, Doorway, Pathway And Parking Areas.

Other Models:

- 6W | 550LM | LRS-B-MCT-PC

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

WG-ZY-Z9-2Z

Photometrics: LRS-A-MCT-PC

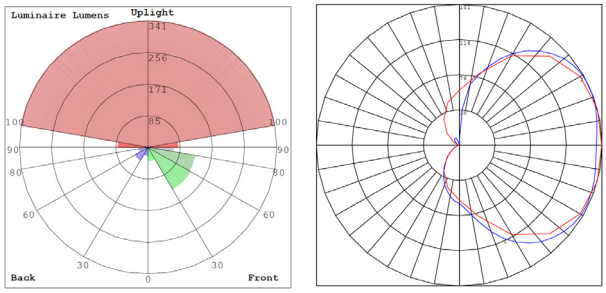

BUD Rating: B0-U3-G1

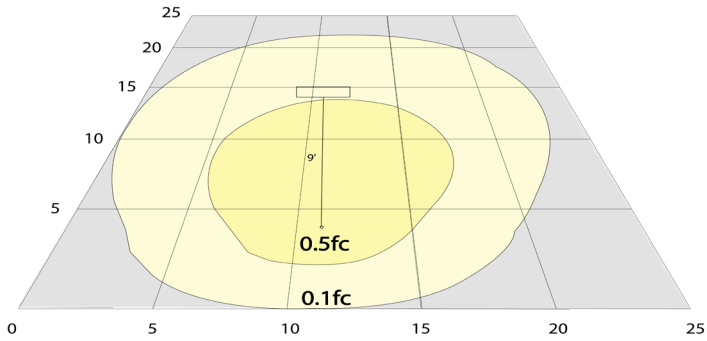

12W 4000K Area 25'x 25' Mounting Height: 9'

Other Views:



Side View



Front View



Night View

Performance Table: LRS-A-MCT-PC

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-A-MCT-PC	12W	120V	1150LM	3000K 4000K 5000K	B0-U3-G1	95

Sample Ordering

Model		Color Temp.		Housing
LRS	- A	- MCT	-	PC

Other Models:



LRS-B-MCT-PC