

# LRS SERIES

Outdoor Lighting

LED RESIDENTIAL LANTERNS WITH PHOTOCELL

LRS-A-40K-PC

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

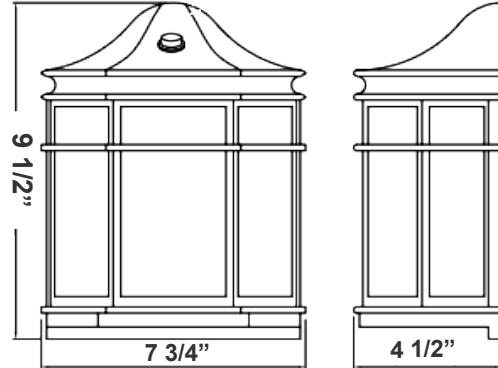

9 1/2"(L) x 7 3/4"(W) x 4 1/2"(D)

LED Residential Lanterns With Photocell Is Ideal For General Site lighting, Loading Docks, Doorway, Pathway And Parking Areas.

## Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Includes pre-wired photocell

## Technical Specifications

### Electrical:

- Voltage: 120V AC, 60 Hz
- Wattage: 12W
- Power Factor: 0.95
- Efficacy: 95 LM/W

### Mechanical:

- Aluminum Housing With Powder Coated
- Frosted Glass Lens
- Includes Pre-Wired Photocell
- Operating Temperature: -40°F to 104°F
- Lifespan: 70,000 hr.
- IP Rating: IP65

### Lighting:

- LED: DOB
- Total lumens: 1150LM
- Color temperature: 4000k
- Color rendering index: >80
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

### Applications:

- LED Wall Pack With Double-Walled Clear/frosted Lens Is Ideal For General Site Lighting, Loading Docks, Doorway, Pathway And P[arking Areas.

### Other Models:

- 6W | 550LM | LRS-B-40K-PC




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-ZY-29-2Z

**Photometrics:** LRS-A-PC

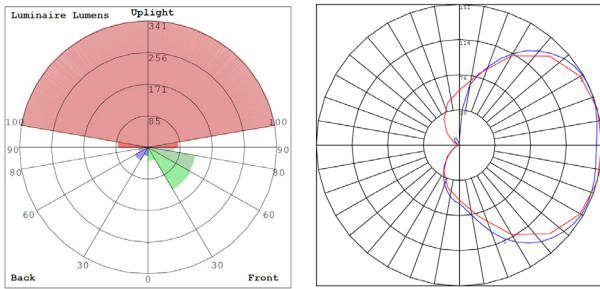

BUD Rating: B0-U3-G1

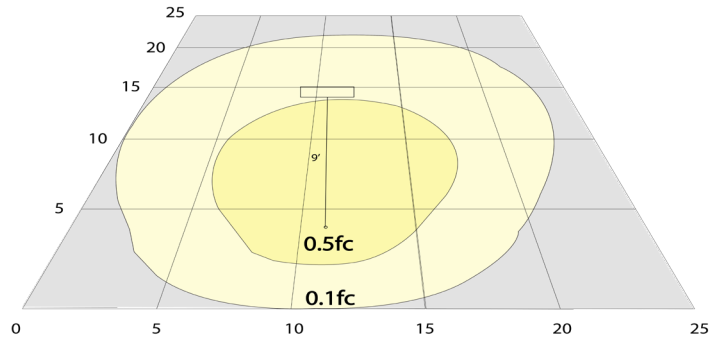

**Other Views:**



Side View



Front View



Night View

**Performance Table:** LRS-A-PC

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-A-40K-PC	12W	120V	1150LM	4000K	B0-U3-G1	95

**Sample Ordering**

Model    
 Color Temp.    
 Housing

LRS - 
 A - 
 40K - 
 PC

**Other Models:**



LRS-B-40K-PC

