

# LRS SERIES

Outdoor Lighting

LED RESIDENTIAL LANTERNS WITH PHOTOCELL

LRS-D-30K-D

LRS-D-40K-D

# WESTGATE


THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

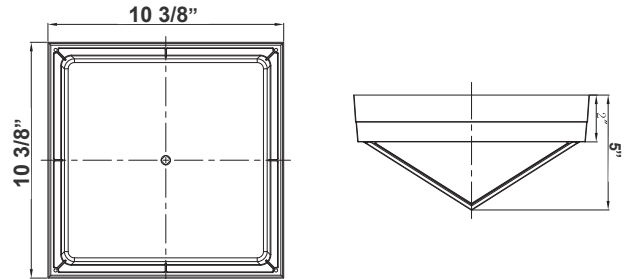

10 1/2"(L) x 10 1/2"(W) x 4 5/8"(D)

LED Residential Lanterns With Photocell Is Ideal For General Site lighting, Loading Docks, Doorway, Pathway And Parking Areas.

## Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Includes Pre-Wired Photocell

## Technical Specifications

### Electrical:

- Voltage: 120V AC, 60 Hz
- Wattage: 12W
- Power Factor: 0.95
- Efficacy: 92 LM/W

### Mechanical:

- Aluminum Housing With Powder Coated
- Frosted Glass Lens
- Includes Pre-Wired Photocell
- Operating Temperature: -40°F to 104°F
- Lifespan: 70,000 hr.
- IP Rating: IP65

### Lighting:

- LED: DOB
- Total Lumens: 1100LM
- Color Temperature: 4000k
- Color Rendering index: >80
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

### Applications:

- LED Wall Pack With Double-Walled Clear/frosted Lens Is Ideal For General Site Lighting, Loading Docks, Doorway, Pathway And Parking Areas.

### Other Models:

- 12W | 1100LM | LRS-C-30K-D
- 12W | 1100LM | LRS-C-40K-D




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-03012023

## Photometrics: LRS-D-D

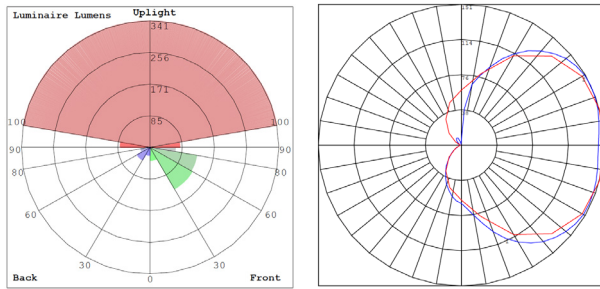

BUD Rating: B0-U3-G1

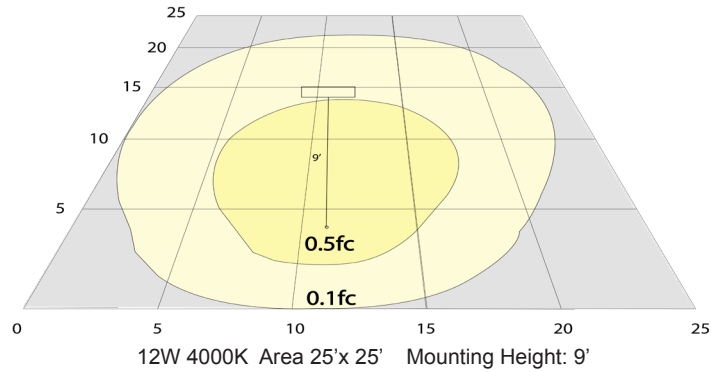

## Other Views:



Side View



Front View



Night View

## Performance Table: LRS-C-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-D-30K-D	12W	120V	1100LM	3000K	B0-U3-G1	92
LRS-D-40K-D				4000K		

## Sample Ordering

Model	Color Temp.	Housing
LRS - D - [ ] - D	30K=3000K 40K=4000K	

## Other Models:



LRS-B-40K-PC

