LRS SERIES Outdoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LRS-F-MCT-C90-WH

ROUND MODEL F ARCHITECTURAL OUTDOOR/INDOOR LED WALL LIGHTS

MCT Multi Power/Wattage (Selectable)


Customer Name:

Project Name:

Note: | Type:



Selection: ☐

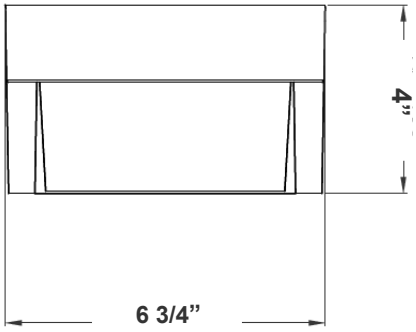

6 3/4"(W) x 4"(H)

LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 12W
- Power Factor: >0.90
- Efficacy: 54 LPW

Lighting:

- LED Type: SMD 3030
- Total Lumens: 650LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Mechanical:

- Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
- Polycarbonate Lens
- Operating Temperature: -4ºF to 104ºF
- Wet Location
- 7-Year Warranty
- IP44

Applications:

- LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.


Other Models:

- 12W | 650LM | LRS-F-MCT-C90-BK
- 12W | 650LM | LRS-F-MCT-C90-MGBR


Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co

WG-ZY-Z9-2Z

Photometrics: LRS-F-MCT-C90-WH

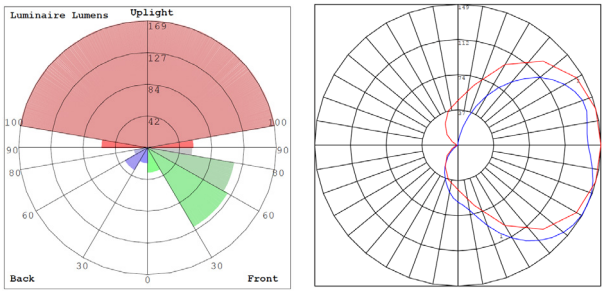

BUG Rating: B0-U3-G1

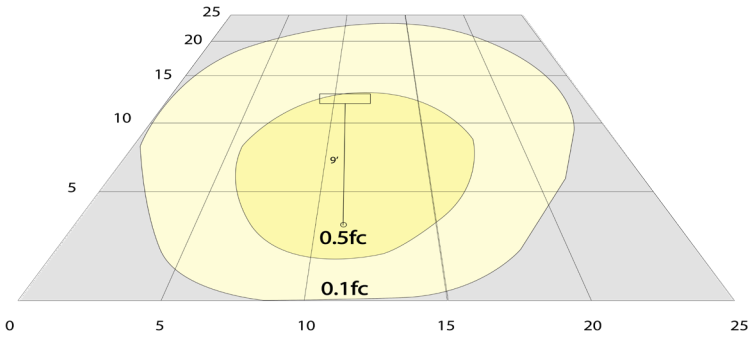

Area 25'x 25' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LRS-E-MCT-C90-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-F-MCT-C90-WH	12W	120V	650LM	3000K 4000K 5000K	B0-U3-G1	54

Sample Ordering

Model		Color Temp.		CRI		Housing
LRS	-	F	-	MCT	-	C90	-	WH

Other Models:



LRS-F-MCT-C90-BK



LRS-F-MCT-C90-MGBR