# LRS SERIES Outdoor Lighting

MULTI-CCT

MCT


LRS-G-MCT-C90-MGBR



LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

### eatures

- Back plate: Die-cast aluminum
- Polycarbonate Lens

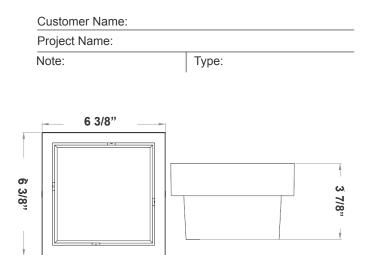

STGA

6 3/8"(L) x 6 3/8"(W) x 3 7/8"(H)

- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

## **Technical Specifications**

#### **Electrical:**

- Voltage: 120V AC 60Hz
- Wattage: 12W
- Power Factor: >0.90
- Efficacy: 54 LPW

#### Mechanical:

- Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
- Marine-Grade Bronze Finish,
- This Process Consists of:
  - 1. Abrasive Blasting
    - 2. Chemical Conversion Coat IAW TTC
    - 3. Epoxy Primer and SDTGIC Polyester Top Coat With 200-Hour on Salt Spray Test
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP44

#### Lighting:

- LED Type/Brand: SMD 3030/ Philips Lumileds LEDs
- Total Lumens: 650LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index:  $CRI \ge 90$
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

#### **Applications:**

LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.


#### Other Models:

12W | 650LM | LRS-G-MCT-C90-WH



• 12W | 650LM | LRS-G-MCT-C90-BK



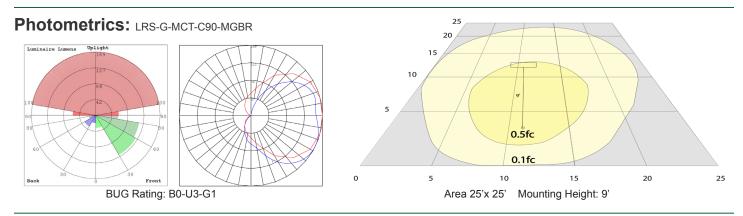

#### **Other Views:**



#### Performance Table: LRS-G-MCT-C90-MGBR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-G-MCT-C90-MGBR	12W	120V	650LM	3000K 4000K 5000K	B0-U3-G1	54

## Sample Ordering

Model			Color Temp.			CRI	RI Housing		
	LRS	-	G	_	MCT	_	C90	] -	MGBR

#### **Other Models:**



LRS-G-MCT-C90-BK



LRS-G-MCT-C90-WH

# WESTGATE

