

# LRS SERIES Outdoor Lighting


LRS-K-24-MCT5-BR  
MODEL K DIE-CAST MODERN WALL SCONCES  
**MCT5** Multi Color Temperature (Selectable)



Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ Type: \_\_\_\_\_

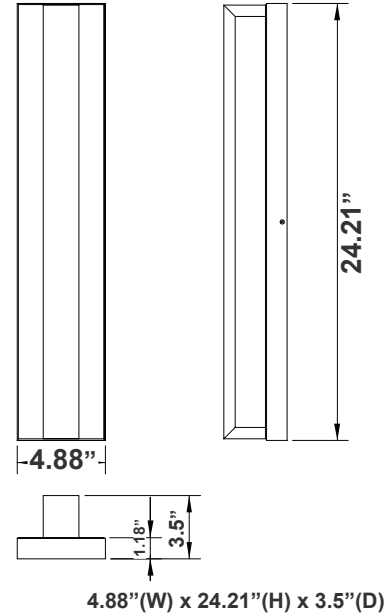

LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

## Features

- Powder Coated Finish With Glass Cover
- Polycarbonate Lens
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

## Technical Specifications

### Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 24W
- Power Factor: >0.90
- Efficacy: 29 LPW

### Mechanical:

- Powder Coated Finish With Glass Cover
- Durable Metal Housing Allows Excellent Heat Dissipation
- Polycarbonate Lens
- Operating Temperature: -4°F to 104°F
- IP44, Suitable For Wet Location
- 7-Year Warranty

### Lighting:


- Multi CCT Switch Is Inside Fixture
- Total Lumens: 700LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

### Applications:


- LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.




## Photometrics: LRS-K-24-MCT5-BR

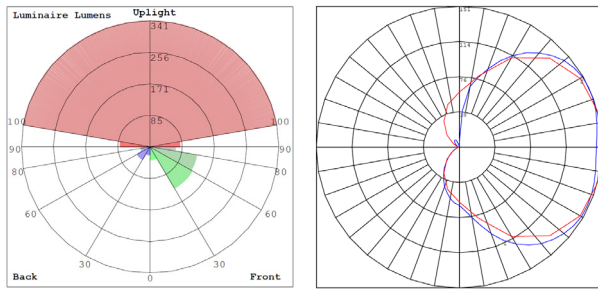

BUD Rating: B0-U3-G1

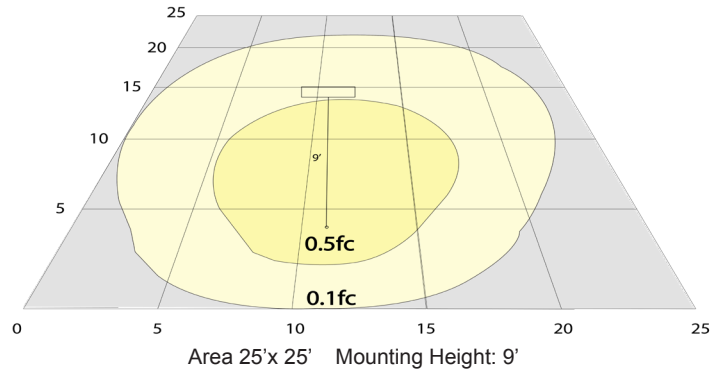

## Other Views:



Side View



Close View



Night View

## Performance Table: LRS-K-24-MCT5-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-K-24-MCT5-BR	24W	120V	700LM	2700K 3000K 3500K 4000K 5000K	B0-U3-G1	29

## Sample Ordering

Model	Size	Color Temp.	House
LRS - K - 24 - MCT5 - BR			

## Other Models:



LRS-WS-12-MCT5-BR

