
LRS SERIES Outdoor Lighting



RS-MC-MCT5-P-WH INI-CONE OUTDOOR WALL SCONCE WITH PHOTOCELL, 5" HEIGHT MCT Multi Power/Wattage (Selectable)



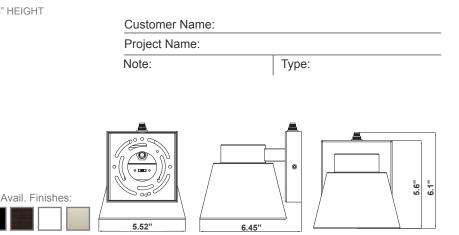

LED Seaside Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.

5 1/2"(W) x 6.1"(H) x 6.45"(D) Back Plate 5"(Diameter)

eatures

- Aluminum Housing and Steel Back Plate
- Frosted Glass Lens

- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 10W
- Power Factor: >0.90
- Efficacy: 70 LPW

Mechanical:

- Photocell Included
- Powder Coated Finish With Glass Cover
- Frosted Glass Lens
- Operating Temperature: -22°F to 104°F
- Wet Location
- 7-Year Warranty
- IP42, Suitable for outdoor use

Lighting:

- Total Lumens: 700LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Applications:

LED Seaside Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.

Other Models:


• 10W | 700LM | LRS-MC-MCT5-P-BK

• 10W | 700LM | LRS-MC-MCT5-P-BN

10W | 700LM | LRS-MC-MCT5-P-BR





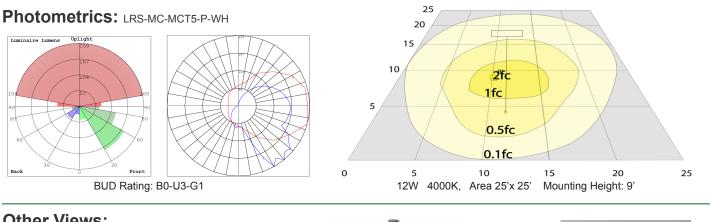

Other Views:



Front View Night View

Performance Table: LRS-MC-MCT5-P-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-MC-MCT5-P-WH	10W	120V	700LM	2700K 3000K 3500K 4000K 5000K	B0-U3-G1	70

Sample Ordering

Model	Style	Color Temp. Photocell Housing
LRS -	MC	– MCT5 – P – WH

Factory-Installed Options:


Blank = No Option For Accessories OPT-EM-LRS-MC = EXTERNAL BACK BOX

Other Model:



LRS-MC-MCT5-P-BK

LRS-MC-MCT5-P-BR





FACTORY-INSTALLED OPTIONS:

WESTGATE

