

LRS SERIES Outdoor Lighting

LRS-N1-MCT-P-ORB

RESIDENTIAL LANTERNS WITH PHOTOCELL, CCT SELECTABLE

MCT Multi Color Temperature (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

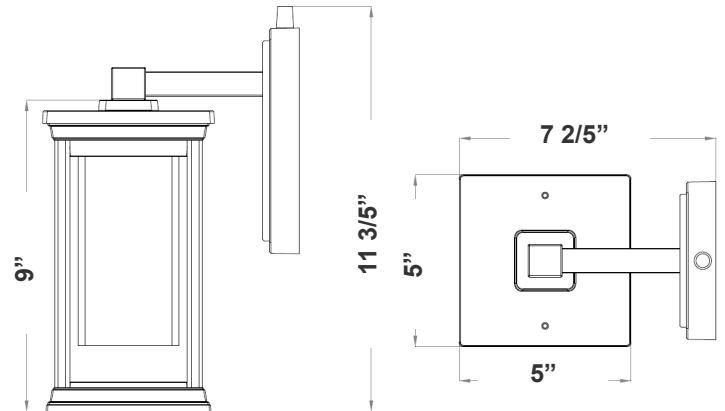

LED Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.

7 2/5"(W) x 11 3/5"(H) x 5"(D)

Features

- Aluminum Housing and Steel Plate
- 10" Model M Residential Lanterns
- Powder-Coated Finish
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 20W
- Power Factor: >0.90
- Efficacy: 42 LPW

Mechanical:

- Oil-Rubbed Bronze Finish
- DC Button Photocell on top of the Mounting Plate
- With Inside Frosted Lens & External Clear Lens
- Operating Temperature: -4°F to 104°F
- 7-Year Warranty
- IP42, Suitable For Wet Location

Lighting:

- Total Lumens: 850LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

Applications:

- LED Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-02022020

Photometrics: LRS-N1-MCT-P-ORB



BUD Rating: B0-U3-G1

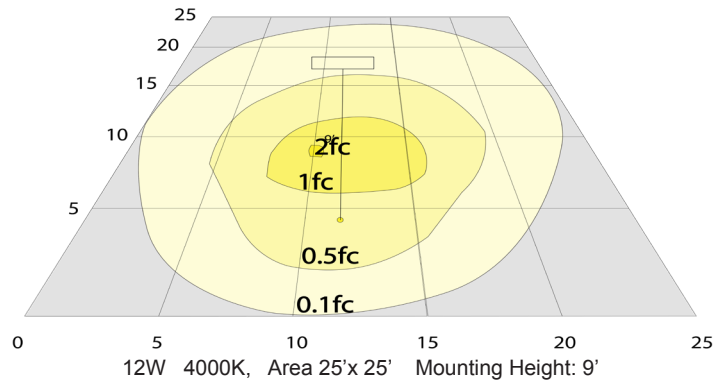

Other Views:



Side View



Front View



Bottom View

Performance Table: LRS-N1-MCT-P-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-N1-MCT-P-ORB	20W	120V	850LM	3000K 4000K 5000K	B0-U3-G1	42

Sample Ordering

Model	Style	Color Temp.	Photocell	Housing				
LRS	-	N1	-	MCT	-	P	-	ORB

Accessories:

Blank = No Option For Accessories

LRS-M-RL-FG = Replacement Default Frosted Lens For LRS-N Series

LRS-M-RL-BG = Replacement Bubble Glass Lens For LRS-N Series

LRS-M-RL-CG = Replacement Cracked Glass Lens For LRS-N Series

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-LRS-MN = Factory-installed EM with External Back Box

ACCESSORIES:



LRS-N-RL-FG




LRS-N-RL-BG



LRS-N-RL-CG

FACTORY-INSTALLED OPTION:

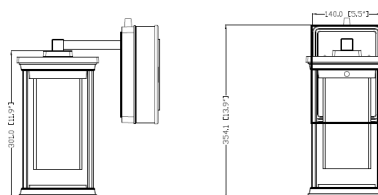

OPT-EM-LRS-MN
11.4"(D) x 13.9"(H) x 5.5"(W)

