LRS SERIES Outdoor Lighting

LRS-P1-MCT-BR

DIE-CAST HIGH PERFORMANCE SELECTABLE 3CCT WALL PACK, PC LENS

Multi Color Temperature (Selectable)




LED Outdoor Wall Lantern With Aluminum Housing & Powder-Doated Finish, Acrylic Diffuser. Ideal for General Site Lighting, Residential Buildings, Doorway, Pathway And Parking Areas.



Customer Name:

Project Name:

Note: Type:



4 1/7"(W) x 10 1/4"(H) x 4 1/3"(D)

Features

- Aluminum Housing and Steel Plate
- Bronze, 10"H Wall Pack
- Powder-Coated Finish

- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

Voltage: 120V AC 60Hz

Wattage: 15WPower Factor: >0.90Efficacy: 65 LPW

Mechanical:

- Aluminum Housing and Steel Plate
- Up Light Or Down Light
- Powder-Coated Finish
- Operating Temperature: -4°F to 104°F
- 7-Year Warranty
- IP42, Suitable For Wet Location

Lighting:

- Multi CCT Switch is Inside Fixture
- Dimming: TRAIC Dimming
- Total Lumens: 975LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

Applications:

 LED Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.

Other Models:

• 30W | 2100LM | LRS-P2-MCTP-BR













Photometrics: LRS-P1-MCT-BR



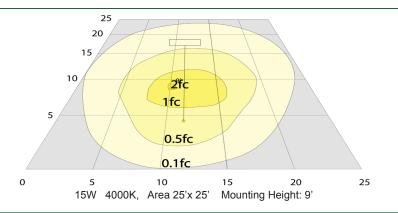

Other Views:







Side View Front View Bottom View

Performance Table: LRS-P1-MCT-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-P1-MCT-BR	15W	120V	420LM	3000K 4000K 5000K	B0-U3-G1	65

Sample Ordering

Model Color Temp. Housing

LRS - P1 - MCT - BR

Other Model: LRS-P2-MCTP-BR







Side View Front View Bottom View





