


LRS SERIES Outdoor Lighting

LRS-PV-MCT-DD
12" OUTDOOR/INDOOR CEILING LIGHT
MCT Multi Color Temperature (Selectable)

Customer Name: _____

Project Name: _____

Note: _____ | Type: _____

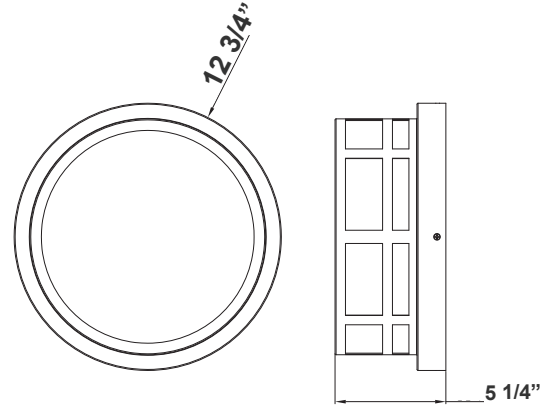

5 1/4"(W) x 12 3/4"(D)

LED Residential Lanterns With Photocell Is Ideal For General Site lighting, Loading Docks, Doorway, Pathway And Parking Areas.

Features

- Back Plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Includes Pre-Wired Photocell
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC, 60 Hz
- Wattage: 25W
- Power Factor: 0.95
- Efficacy: 77 LM/W

Mechanical:

- Aluminum Housing With Powder Coated
- Frosted Glass Lens
- Includes Pre-Wired Photocell
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- 7-Year Warranty

Lighting:


- Multi CCT Switch is Inside Fixture
- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- LED: DOB
- Total Lumens: 1920LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >80
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

Applications:


- LED Wall Pack With Double-Walled Clear/frosted Lens Is Ideal For General Site Lighting, Loading Docks, Doorway, Pathway And Parking Areas.



Photometrics: LRS-PV-MCT-DD

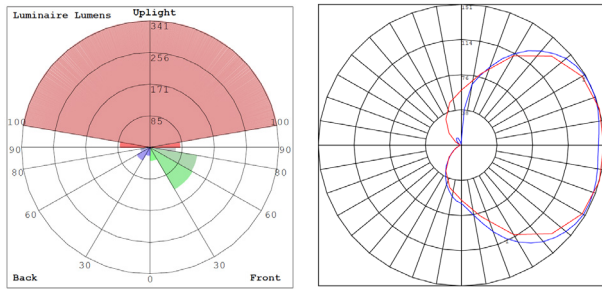

BUD Rating: B0-U3-G1

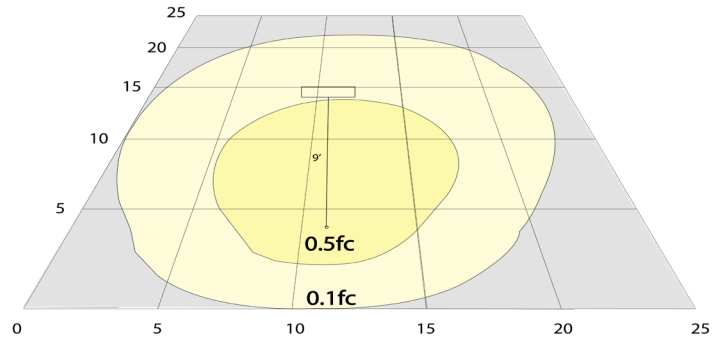

12W 4000K Area 25'x 25' Mounting Height: 9'

Performance Table: LRS-PV-MCT-DD

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-PV-MCT-DD	25W	120V	1920LM	3000K 4000K 5000K	B0-U3-G1	77

Sample Ordering

Model	Color Temp.	Dimming
LRS - PV - MCT - DD		

