


# LRS SERIES Outdoor Lighting

LRS-S2-MCT5-DD-ORB  
WALL CUBE WITH ADJ. BEAM ANGLE UP/DOWN LIGHTS  
**MCT5** Multi Color Temperature (Selectable)

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

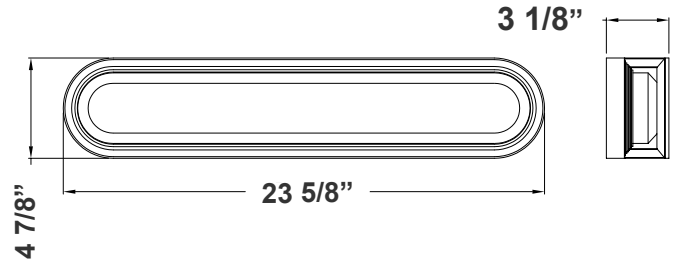

23 5/8" (W) x 4 7/8" (H) x 3 1/8" (D)

LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

## Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

## Technical Specifications

### Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 25W
- Power Factor: >0.90
- Efficacy: 75 LPW

### Mechanical:

- Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
- Polycarbonate Lens
- Operating Temperature: -4°F to 104°F
- IP44, Suitable For Wet Location
- 7-Year Warranty

### Lighting:

- LED Type/Brand: SMD 3030/ Philips Lumileds LEDs
- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Total Lumens: 1875LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

### Applications:

- LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

## Other Models:

- 25W | 1500LM | LRS-S1-MCT5-DD-ORB




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |




WG-ZY-29-2Z

**Photometrics:** LRS-S2-MCT5-DD-ORB

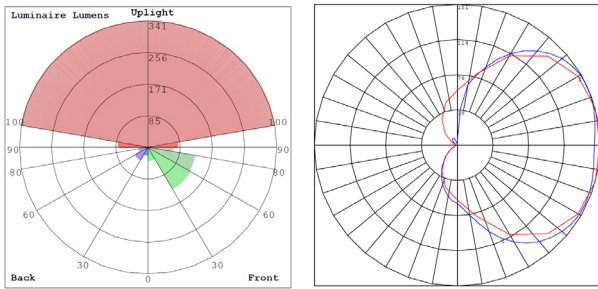

BUD Rating: B0-U3-G1

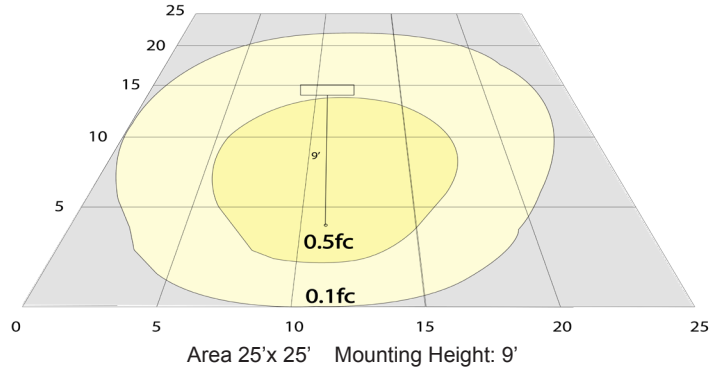

**Other Views:**



Side View



Front View



Back View

**Performance Table:** LRS-S2-MCT5-DD-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-S2-MCT5-DD-ORB	25W	120V	1875LM	2700K 3000K 3500K 4000K 5000K	B0-U3-G1	75

**Sample Ordering**

Model	Color Temp.	Dimming	Housing
LRS - S2 - MCT5 - DD - ORB			

**Other Models:**



LRS-S1-MCT5-DD-ORB

