LRS SERIES Outdoor Lighting

LRS-SH-24-MCTP-DD-ORB


SHOJI WINDOW WALL SCONCE POWER AND CCT ADJUSTABLE

MITP Multi Color Temperature & Multi Power/Wattage (Selectable)



Shoji Window Wall Sconce featuring a sleek, modern design inspired by traditional Shoji windows. Built with adjustable power settings and selectable CCT (Correlated Color Temperature) options, this fixture allows customized brightness and ambience to suit various spaces. Ideal for residential and commercial interiors, it combines energy efficiency, versatility, and timeless style.



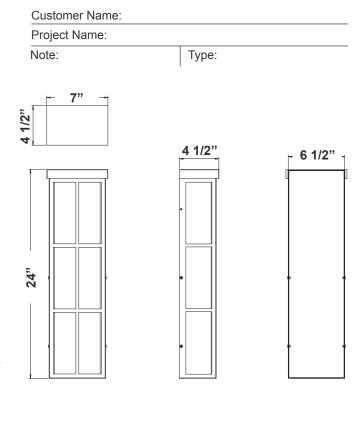

7"(W) x 24"(H) x 4 1/2"(D)

Features

- Aluminum Housing and Steel Back Plate
- Frosted Shoji-Style PC Lens on 4 Sides
- 24" Oil-Rubbed Bronze

- 7-Year Warranty
- Oil-rubbed bronze, 7' X24"
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

Voltage: 120V AC 60Hz
Wattage: 18W/24W/30W
Power Factor: >0.90
Efficacy: 70 LPW

Mechanical:

- · Aluminum Housing and Steel Back Plate
- 24" Oil-Rubbed Bronze
- Frosted Shoji-Style PC Lens on 4 Sides
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP42, Suitable for outdoor use

Lighting:

- Dimming: Traic Dimming and 0~10V Dimmable
- Total Lumens: 2100LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Applications:

 LED Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.















Photometrics: LRS-SH-24-MCTP-DD-ORB



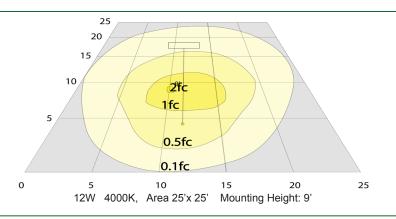

Other Views:







Honey Color Lens

Performance Table: LRS-SH-24-MCTP-DD-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-SH-24-MCTP-DD-ORB	18W/24W/30W	120V	1260LM 1680LM 2100LM	3000K 4000K 5000K	B0-U3-G1	70

Sample Ordering

Model		Size	Color Temp.	Dimming	Housing
LRS =	SH	- 24	– MCTP –	DD	ORB

Accessory Options

LRS-SH-24-HLK = Honey-Color Replacement Lens for LRS-SH-24

OPTIONAL ACCESSORIES



LRS-SH-24-HLK

