

LRS SERIES Outdoor Lighting

LRS-SH-40-MCTP-DD-ORB
SHOJI WINDOW WALL SCONCE POWER AND CCT ADJUSTABLE
MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)



Shoji Window Wall Sconce featuring a sleek, modern design inspired by traditional Shoji windows. Built with adjustable power settings and selectable CCT (Correlated Color Temperature) options, this fixture allows customized brightness and ambience to suit various spaces. Ideal for residential and commercial interiors, it combines energy efficiency, versatility, and timeless style.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

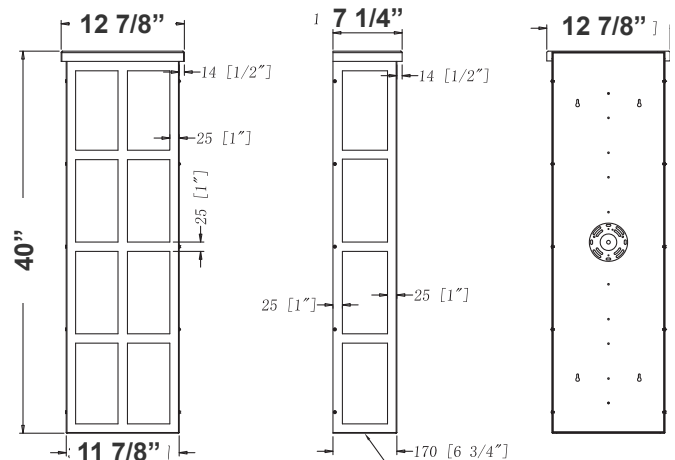

12 7/8"(W) x 40"(H) x 7 1/4"(D)

Features

- Aluminum Housing and Steel Back Plate
- Frosted Shoji-Style PC Lens on 4 Sides
- 40" Oil-Rubbed Bronze
- 7-Year Warranty
- Oil-rubbed bronze, 7' X24"
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 40W/60W/80W
- Power Factor: >0.90
- Efficacy: 70 LPW

Mechanical:

- Aluminum Housing and Steel Back Plate
- 40" Oil-Rubbed Bronze
- Frosted Shoji-Style PC Lens on 4 Sides
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP42, Suitable for outdoor use

Lighting:

- Dimming: Traic Dimming and 0~10V Dimmable
- Total Lumens: 5600LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Applications:

- LED Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-02022020

Photometrics: LRS-SH-40-MCTP-DD-ORB



BUD Rating: B0-U3-G1

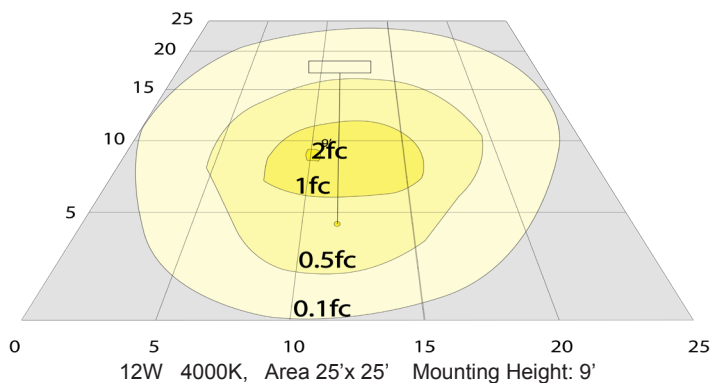

Other Views:



Side View

Performance Table: LRS-SH-40-MCTP-DD-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-SH-40-MCTP-DD-ORB	40W/60W/80W	120V	2800LM 420LM 5600LM	3000K 4000K 5000K	B0-U3-G1	70

Sample Ordering

Model		Size		Color Temp.		Dimming		Housing		
LRS	-	SH	-	40	-	MCTP	-	DD	-	ORB

