LRS SERIES Outdoor Lighting

LRS-TU-MCT5-DD-BK LRS-TU-MCT5-DD-BN LRS-TU-MCT5-DD-BR LRS-TU-MCT5-DD-WH


TUNNEL OUTDOOR WALL SCONCE, RESIDENTIAL/COMMERCIAL


Multi Color Temperature (Selectable)



The Westgate Tunnel Outdoor Wall Sconce is a versatile lighting solution designed for both residential and commercial applications. Combining sleek, modern aesthetics with robust functionality, this dual-purpose sconce provides reliable illumination and energy efficiency. Its durable construction ensures long-lasting performance, making it ideal for various outdoor environments. With easy installation and maintenance, the Westgate Tunnel Outdoor Wall Sconce offers a practical and stylish lighting option that enhances safety and ambiance for any exterior space.





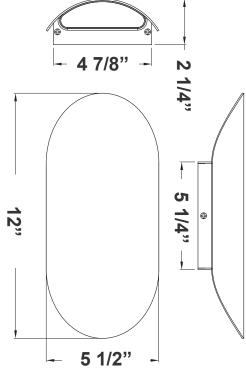

5 1/2"(W) x 12"(H) x 2 1/4"(D)

Features

- Die-Cast Aluminum with Mounting/Gasket Installed
- Frosted Lens

- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

Voltage: 120-277V AC 60Hz

Wattage: 2 x 12WPower Factor: >0.95Efficacy: 80 LPW

Mechanical:

- Die-Cast Aluminum with Mounting/Gasket Installed
- Operating Temperature: -4°F to 140°F
- IP44, Suitable For Wet Location
- 7-Year Warrantv

Lighting:

- Multi CCT Switch is Inside Fixture
- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Frosted Lens
- Total Lumens: 1920LM
- Color Temperatures:
 - 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Rated Life: 70,000 Hrs

Applications:

- Home Exteriors
- Commercial Entrances
- Outdoor Walkways
- Parking Areas
- Garden and Landscape Lighting















Photometrics: LRS-TU-MCT5-DD



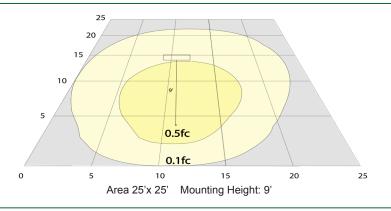

Performance Table: LRS-TU-MCT5-DD

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|--|---------|----------|--------|---|------------|-----|
| LRS-TU-MCT5-DD-BK LRS-TU-MCT5-DD-BN LRS-TU-MCT5-DD-BR LRS-TU-MCT5-DD-WH | 2x14W | 120-277V | 1920LM | 2700K 3000K 3500K 4000K 5000K | B0-U3-G1 | 80 |

Sample Ordering

| Model | Color Temp. | Dimming | Housing |
|---------|-----------------|-----------|-------------------------------|
| LRS - T | U – MCT5 | DD | |
| | | | BK= BLACK BN= BRUSH NICKEL |
| | | | BR= BRONZE |
| | | | WH= WHITE |