

LRS SERIES Outdoor Lighting

LRS-WS-12-MCT5-BR
DIE-CAST MODERN WALL SCONCES

MCT5 Multi Color Temperature (Selectable)

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Selection:




LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

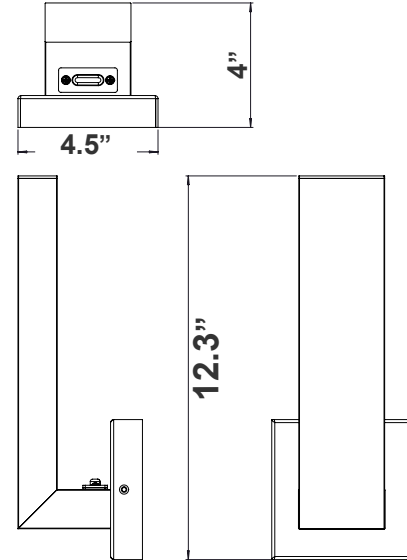

4.5"(W) x 12.3"(H) x 4"(D)

Features

- Powder Coated Finish With Glass Cover
- Polycarbonate Lens
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 20W
- Power Factor: >0.90
- Efficacy: 50 LPW

Mechanical:

- Powder Coated Finish With Glass Cover
- Durable Metal Housing Allows Excellent Heat Dissipation
- Polycarbonate Lens
- Operating Temperature: -4°F to 104°F
- IP44, Suitable For Wet Location
- 7-Year Warranty

Lighting:

- Multi CCT Switch Is Inside Fixture
- Total Lumens: 1000LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

Applications:

- LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

Other Models:


- 30W | 1500LM | LRS-WS-18-MCT5-BR




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |



Photometrics: LRS-WS-12-MCT5-BR

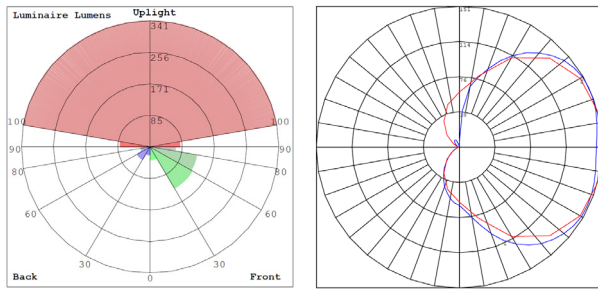

BUD Rating: B0-U3-G1

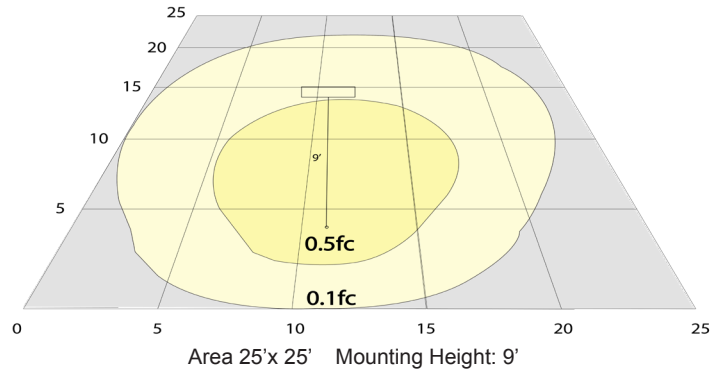

Other Views:



Side View



Front View



Night View

Performance Table: LRS-WS-12-MCT5-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-WS-12-MCT5-BR	20W	120V	1000LM	2700K 3000K 3500K 4000K 5000K	B0-U3-G1	50

Sample Ordering

Model	Size	Color Temp.	House
LRS	WS	12	MCT5 - BR

Other Models:



LRS-WS-18-MCT5-BR

