## LRS SERIES Outdoor Lighting

LRS-WS-18-MCT5-BR
DIE-CAST MODERN WALL SCONCES

Multi Color Temperature (Selectable)






LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.



**Customer Name:** 

Project Name:

Note: Type:



## **Features**

- Powder Coated Finish With Glass Cover
- Polycarbonate Lens

- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

## **Technical Specifications**

#### **Electrical:**

Voltage: 120V AC 60Hz

Wattage: 30WPower Factor: >0.90Efficacy: 50 LPW

#### Mechanical:

- Powder Coated Finish With Glass Cover
- Durable Metal Housing Allows Excellent Heat Dissipation
- Polycarbonate Lens
- Operating Temperature: -4°F to 104°F
- IP44, Suitable For Wet Location
- 7-Year Warranty

## Lighting:

- Multi CCT Switch Is Inside Fixture
- Total Lumens: 1500LM
- Color Temperatures:
  - 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

#### Applications:

• LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

#### Other Models:

• 20W | 1000LM | LRS-WS-12-MCT5-BR











#### Photometrics: LRS-WS-18-MCT5-BR



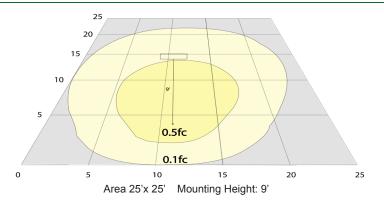

### **Other Views:**







Performance Table: LRS-WS-18-MCT5-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-WS-18-MCT5-BR	30W	120V	1500LM	2700K 3000K 3500K 4000K 5000K	B0-U3-G1	50

# Sample Ordering

Model		Size	Color Temp.			House		
LRS -	WS	_[	18	] _	MCT5	_	BR	

### **Other Models:**



LRS-WS-12-MCT5-BR

