




DIMENSIONS:



Models painted white
Wire guard kit available
for both sizes

LSL-4FT-40W-35K-D
LSL-4FT-40W-40K-D
LSL-4FT-40W-50K-D

LSL-2FT-20W-35K-D
LSL-2FT-20W-40K-D
LSL-2FT-20W-50K-D

LED STRIP LIGHTS

LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount application such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc. Engineered with stable performance LED engines and world's top brand LED driver. Same footprint as traditional 2-lamp strip lights.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277VAC 50/60Hz
- Wattages: 40W and 20W
- Color Temperature: 3500K, 4000K and 5000K
- Operating Temperature: -4°F ~ 131°F
- Dimmable: 0~10V dimmable
- CRI: >80
- IP Rating: IP20
- Life span: 50,000 hrs.

HOUSING SPECIFICATIONS:

- Housing: Steel base with powder coating
- Lens: Frosted diffuse PC lens
- Ceiling-mounted


WARRANTY: 5 years

CERTIFICATIONS:



MODEL	WATTS	VOLTS	LUMENS	COLOR TEMP
LSL-4FT-40W-35K-D	40W	120~277V	4200LM	3500K
LSL-4FT-40W-40K-D	40W	120~277V	4200LM	4000K
LSL-4FT-40W-50K-D	40W	120~277V	4200LM	5000K
LSL-4FT-20W-35K-D	20W	120~277V	2200LM	3500K
LSL-4FT-20W-40K-D	20W	120~277V	2200LM	4000K
LSL-4FT-20W-50K-D	20W	120~277V	2200LM	5000K

LUX CHART:

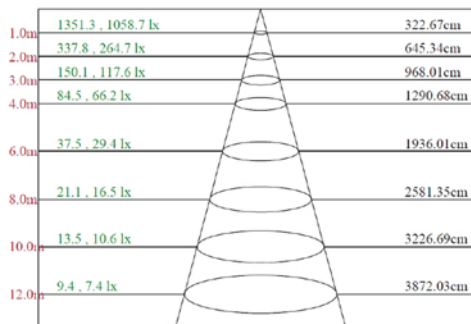

Max, Ave Beam angle of C45plane116.1°

PHOTOMETRICS:

