

LSL-2FT-20W-MCT-D



MULTI-CCT Selection:
MCT3


LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc. Engineered with stable performance LED engines and the world's top brand LED driver. Same footprint as traditional 2-lamp strip lights

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

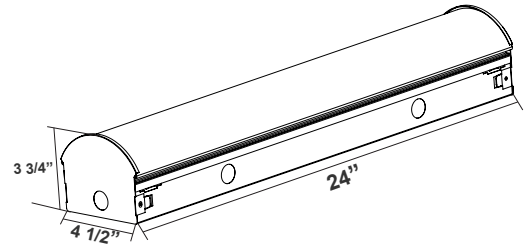

24"(L) x 4 1/2"(W) x 3 3/4"(H)

Features

- LED Strip Lights
- Strip Line Cover
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Frosted Diffuse Polycarbonate Lens with Strip Lines Inside
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W
- Power Factor: >0.98
- Efficacy: 109/ 113/ 110 LPW

Mechanical:

- White Finish
- Housing: Heavy Die-Formed Steel, White Powder Coated
- Lens Snaps into the tabs of the Housing Fixture
- Ceiling-Mounted
- Same Footprint as Traditional 2-lamp Strip Lights
- Mounting: Surface Mount, Wall Mount or Suspended
- IP44 Suitable For Damp Location
- Operating Temperature: -22°F -104°F

Lighting:

- Dimmable: 0~10V Dimming
- Chip: Samsung
- Total Lumens: 2180LM/ 2210LM/ 2270LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi-CCT (Selectable switch inside fixture)
- Color Rendering Index: CRI ≥ 80
- IP Rating: IP44

Applications:



- Ideal for architectural lighting solutions, a variety of industrial, commercial and residential applications

Other Models:


- 30W | 3280LM | LSL-3FT-30W-MCT-D
- 40W | 4350LM | LSL-4FT-40W-MCT-D
- 60W | 6560LM | LSL-6FT-60W-MCT-D
- 80W | 8700LM | LSL-8FT-80W-MCT-D
- 84W | 13200LM | LSL-8FT-84W-MCT-D-HL



Photometrics: LSL-2FT-MCT



BUD Rating: B1-U3-G1

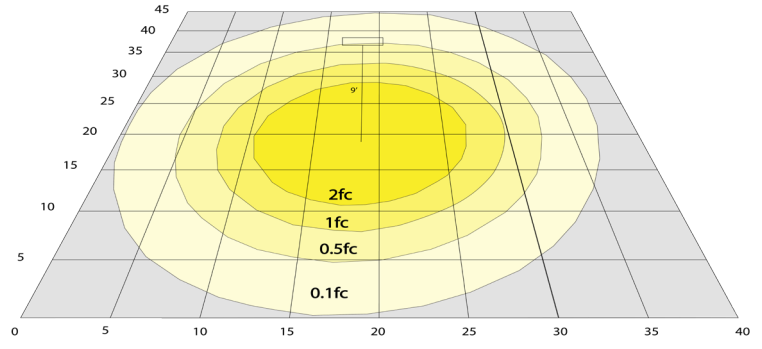


Area 45'x 40' Mounting Height: 9'

Other Views:



Front View



Side View



Back View

Performance Table: LSL-2FT-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LSL-2FT-20W-MCT-D	20W	120~277V	2180LM	3500K	B1-U3-G1	109
			2210LM	4000K		110
			2270LM	5000K		113

Sample Ordering

Model	Size	Wattage	Color Temp.	Feature				
LSL	-	2FT	-	20W	-	MCT	-	D

Accessories:

Blank = No Option For Accessories

LSL-4FT-WG = WIRE GUARD KIT FOR 4FT. STRIP LIGHT

SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10FT (2 PER SET)

SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT (2 PER SET)

LSL-CB = ALIGNMENT BRACKET

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-CM1INT= INTERNAL EMERGENCY BACKUP BATTERY

OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING

OPT-SEN-2USRC = OPTIONAL RC

OPT-SEN-LLHB-OC1 = LLHB-OC1 EXTERNAL STANDARD PIR OPT-SENSOR

OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE

OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE

OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A, 125V, 3-CONDUCTOR


18AWG, WHITE OPT-SEN-DAYLIGHT = DAYLIGHT HARVESTING SENSOR WORKS WITH ABOVE

OPT-SEN-2US

Example:

- LSL-2FT-20W-MCT-D (FOR LSL 20W MCT FIXTURE 120-277V)
- LSL-2FT-20W-MCT-D (FOR LSL 20W MCT FIXTURE 120-277V)
LSL-2FT-WG (WIRE GUARD KIT FOR 2FT. STRIP LIGHT)
- LSL-2FT-20W-MCT-D (FOR LSL 20W MCT FIXTURE 120-277V)
LSL-2FT-WG (WIRE GUARD KIT FOR 2FT. STRIP LIGHT)
OPT-SEN-2US (ULTRASONIC BI-LEVEL DIMMING REMOTE NOT NEEDED)

ACCESSORIES:



LSL-4FT-WG



LSL-CB



SCL-GSY10



SCL-GSY20

FACTORY-INSTALLED OPTIONS:



OPT-HBC-125SB-WH



OPT-HBC-125TL-WH



OPT-HBC-277TL-WH



OPT-EM-CM1INT



OPT-SEN-2US



OPT-SEN-LLHB-OC1



OPT-SEN-2USRC



OPT-SEN-DAYLIGHT

