


# LSN SERIES Commercial Lighting

LSN-4FT-32W-35K-D  
LSN-4FT-32W-40K-D  
LSN-4FT-32W-50K-D  
4FT NARROW STRIP

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_



Selection:

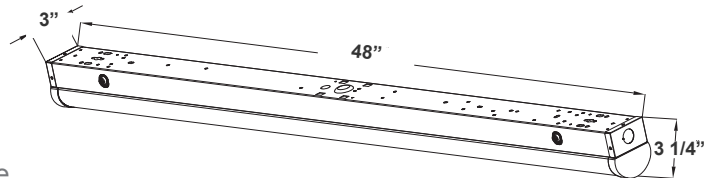

48"(L) x 3"(W) x 3 1/4"(H)

LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.

Ideal choice for residential, commercial, and industrial lighting. Steady performance and long lifetime. Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below

## Features

- High Lumen Efficiency
- Ceiling Mount or Suspended Mount
- Linkable (Optional Alignment Bracket Available)

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 32W
- Power Factor: >0.99
- Efficacy: 130 LPW

### Mechanical:

- Whit Finish
- Lens: Polycarbonate Frosted Lens, Shatter Resistant Translucent Lens Caps Illuminate With The Light.
- Integrated Lens & LED Module for Easy Installation & Ceiling Mount or Suspended Mount
- Junction Box Cover Kit Included, It Sits on Any 3" or 4" Round Junction Boxes
- Operating Temperature: -4°F -122°F
- Housing: Cold-rolled Steel
- Lens: Polycarbonate Frosted Lens
- IP20, Indoor Use Only
- 5-Year Warranty

### Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 4160LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Reduces Energy Consumption Up to 80% Compared to a Fluorescent Fixture
- Rated life: 50,000 Hrs

### Applications:



- LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.
- Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below
- Ideal for residential, commercial, and industrial lighting. Steady performance and long lifetime

### Other Models:


- 40W | 5200LM | LSN-4FT-40W-35K-D
- 40W | 5200LM | LSN-4FT-40W-40K-D
- 40W | 5200LM | LSN-4FT-40W-50K-D



## Photometrics: LSN-4FT-32W-D



BUD Rating: B1-U3-G2

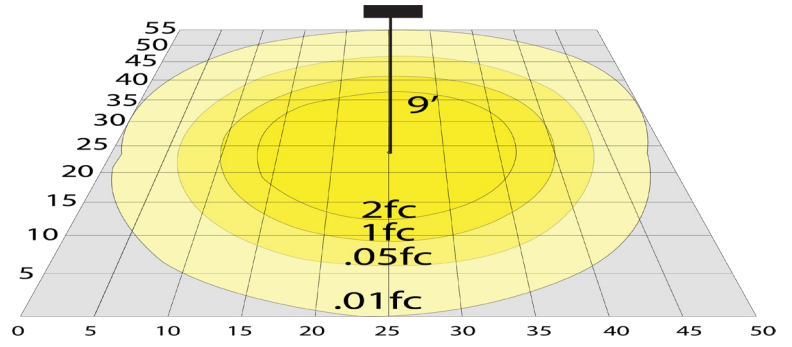

32W 5000K, Area 55'x 50' Mounting Height: 9'

## Other Views:



End View



Side View



Back View

## Performance Table: LSN-4FT-32W-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LSN-4FT-32W-35K-D LSN-4FT-32W-35K-D LSN-4FT-32W-35K-D	32W	120~277V	4160LM	3500K 4000K 5000K	B1-U3-G2	130

## Sample Ordering

Model Size Wattage Color Temp.

LSN - 4FT - 32W -  - D

30K = 3500K  
40K = 4000K  
50K = 5000K

## Accessories:

Blank = No Option For Accessories  
 LSN-CB = LSN SERIES ALIGNMENT BRACKET  
 SCL-TBC-WN = T-BAR CLIP WITH SUSPENSION HOLE ON TOP. WING NUT AND WASHER INCL.  
 SCL-CSY = ADJUSTABLE 1/16" 6FT. SUSPENSION KIT WITH Y-CONNECTOR KEY HOLE SET + 2 T-BAR CLIPS + 1 CABLE BUSHING + 3 PLASTIC TIE STRAPS - 70 LBS. MAX LOAD  
 SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET)  
 SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET)  
 SCL-GSY110 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.)  
 SCL-GSY120 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.)  
 LSN-4FT-WG = WIRE GUARD KIT FOR 4FT OR SET OF 2 FOR 8FT LSN STRIP LIGHT

## Factory-Installed Options:

Blank = No Option For Accessories  
 OPT-EM-CM1INT= INTERNAL EMERGENCY BACKUP BATTERY  
 OPT-SEN-2MDR-36= PROGRAMMABLE MICROWAVE BI-LEVEL  
 OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V  
 OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V  
 OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG  
 WEC-3RC = OPTIONAL REMOTE

## ACCESSORIES:



## FACTORY-INSTALLED OPTIONS:

